


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2016.02.23.

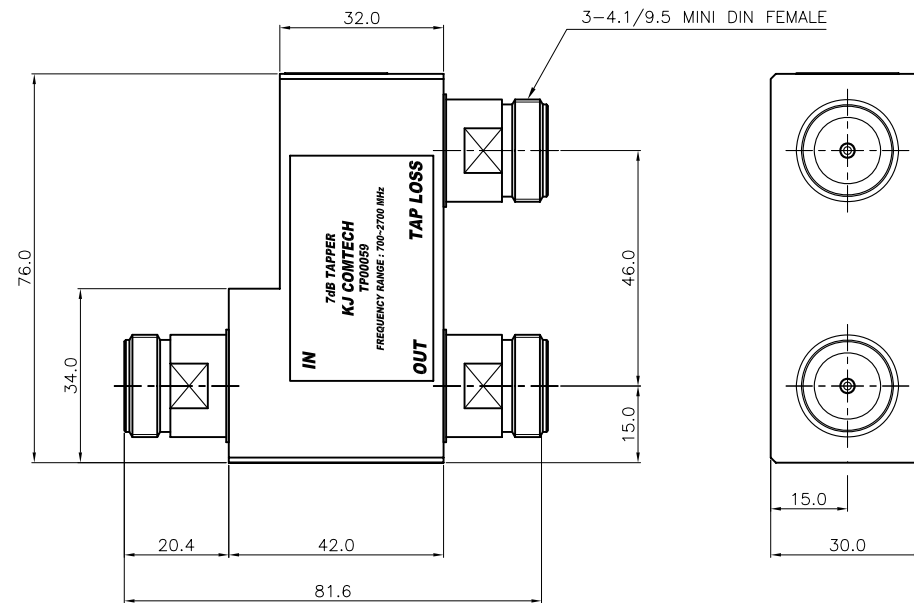

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 700~2700MHz
 Tap Loss : $7.0 \pm 0.8\text{dB}$
 Insertion loss (Max.) : 1.5dB
 Input V.S.W.R (Max.) : 1.4 : 1
 PIMD (Max.) : -155dBc (@ 43dB 2tone)
 Power Handling (Max.) : 500.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 (DIC-547)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATION
 IP-65

TOLERANCE	Decimal ±0.3	DATE 2016. 02. 23.	KJ COMTECH KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL	A6061 T6	CHECKED BY S.L.SON	TITLE 7dB POWER TAPPER	
FINISH	DIC-547	DRAWN BY T.J.KIM		
SCALE 1/1		UNIT mm	A3	DWG NO. TP00059-6/1
				REVISION 1