


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			2000.02.10.
1	[설번처리No.201803-0008] 상대물 체결시 가스켓 누름현상 없음- 바디,캡 수정	S.Y.EUN	I.C.KIM	2018.04.03.
2	[설번처리No.201807-0006] 완제품 및 부품 도면 구성 오류로 인한 구조 재변경	S.Y.EUN	I.C.KIM	2018.07.12.
3	[설번처리No.201807-0009] 공용화 치수 변경으로 인한 바디 및 절연체 변경	S.Y.EUN	I.C.KIM	2018.07.26.
4	특성개선으로 인한 구조 변경	S.Y.EUN	I.C.KIM	2020.03.03.

5/8-24 UNEF-2A

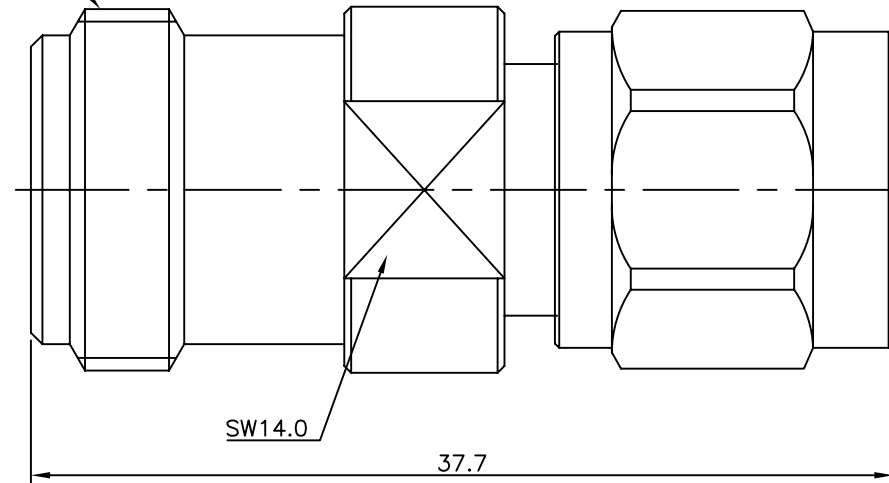


ELECTRICAL DATA

1	Frequency range	DC ~ 6.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R (Max)	1.2:1@3GHz / 1.3:1@6GHz
4	Insertion Loss (Min)	-0.2dB min

6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00135-5/6
5	SPRING RING	1	SUS	Pasivated	DSR00024-5/1
4	GASKET	1	SILICONE		DGK00008-N/1
3	INSULATOR	1	TEFLON		DIN03123-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03348-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00398-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2020. 03. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50 (J) TNC50 (P) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	3/1	DWG NO. AD00086-7/3 REVISION 4 SHEET 1 of 1
		UNIT	mm	



A4