


CF00259-7/1

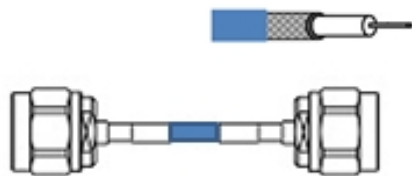

N-PS+N-PS+
141FJ(BLUE)

N PS 141TP

BO/NI, PI/GO, CH/BR/NI

CF00259-7/1 152mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

152mm - S11/S22/S21
(SWR, SWR, dB)

■ 1.0GHz - 1.02, 1.01, 0.09
■ 2.0GHz - 1.06, 1.07, 0.17
■ 3.0GHz - 1.03, 1.04, 0.24
■ 4.0GHz - 1.04, 1.03, 0.39
■ 5.0GHz - 1.15, 1.13, 0.62
■ 6.0GHz - 1.13, 1.08, 0.64
■ 7.0GHz - 1.19, 1.19, 0.38

■ 8.0GHz - 1.24, 1.21, 0.31

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ N (J) SMA (J) AD00424-7/1

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

