


Band Pass Filter

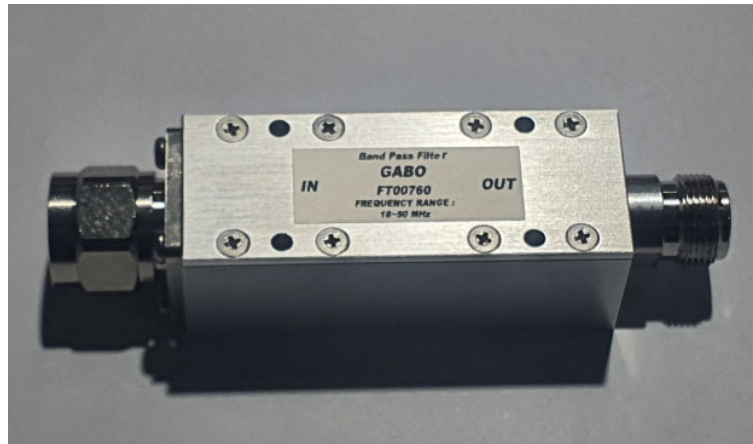

- KJ Comtech Code :FT00760-7/1
- N-TYPE(M),N-Type (F)
- Pass Band: 18~50MHz, Rejection Band: DC~15MHz, 70~2000MHz


1. Electrical & Mechanical Specification

Electrical Specifications			
Type	Band Pass Filter		
Connector	N-Type(M), N-Type(F)		
Frequency Range	DC~15MHz	18~50MHz	70~2000MHz
Insertion Loss	-	≤1.5dB	-
Rejection	≥18 dB		≥28 dB
Flatness	-	≤1.0dB	-
VSWR	-	≤1.5 : 1	-
Power Handing	1W		
Impedance	50Ω		
Mechanical Specifications			
Dimensions(mm)	112.9 x 28.0 x 26.0		
Operating Temperature	-20~+70℃		

2. RF Measurement Data

1) Sample1

TR1: Input VSWR, TR2: Output VSWR, TR3: Input-Output Insertion Loss, Rejection

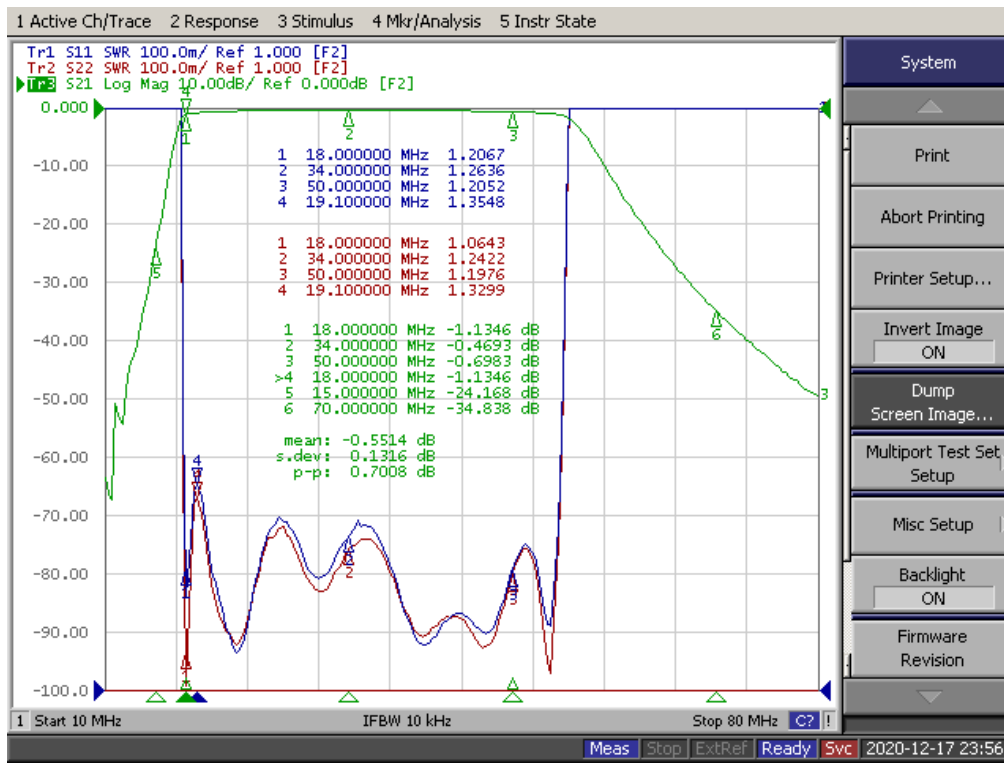

2) Sample2

TR1: Input VSWR, TR2: Output VSWR, TR3: Input-Output Insertion Loss, Rejection

