
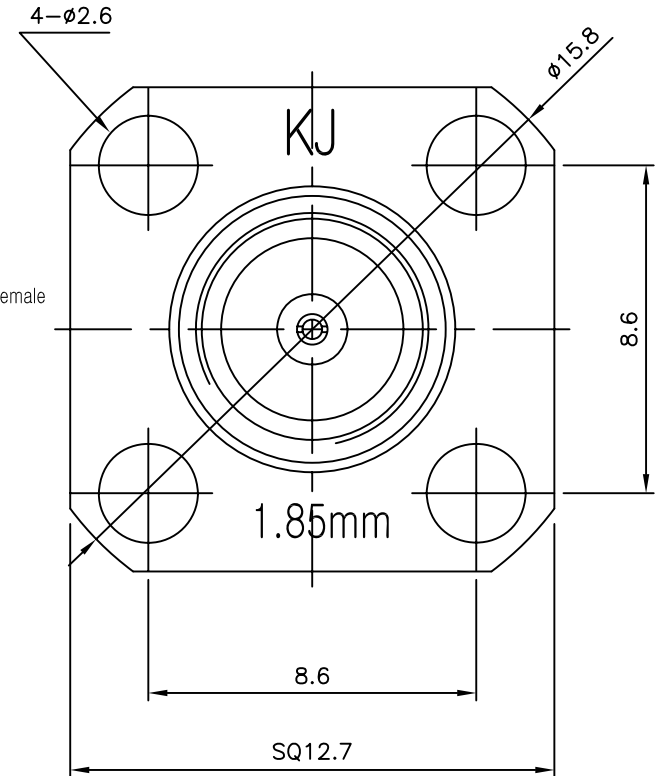


REVISION					
REV	DESCRIPTION			DRAWN	APPR
IR	Initial Registration			S.Y.EUN	I.C.KIM
					DATE
					2020.07.24.

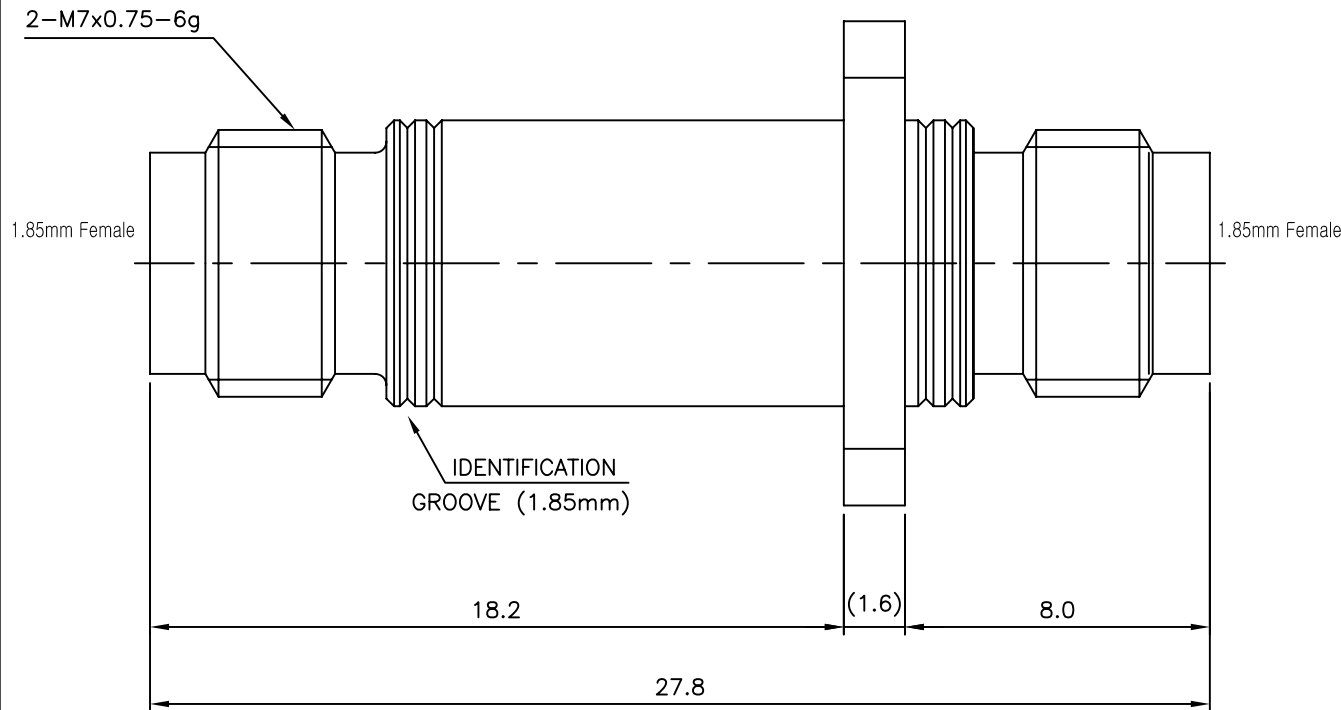

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~67GHz
3. VSWR (Max) : 1.3

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

6	INSERT	1	SUS303	Passivate	DIS00302-5/A
5	INSERT	1	SUS303	Passivate	DIS00302-5/7
4	INSULATOR	1	PEEK		DIN03059-N/B
3	INSULATOR	1	TEFLON		DIN03156-N/1
2	CONTACT	1	SUS303	Gold Plate 1.3 μ m	DAC03354-5/5
1	BODY	1	SUS303	Passivate	DAD00386-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 07. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 1.85mm (J) 1.85mm (J) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. AD00674-7/4 REVISION I R SHEET 1 of 1
		UNIT	mm	