


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.M.LEE	I.C.KIM	2014. 11. 19.

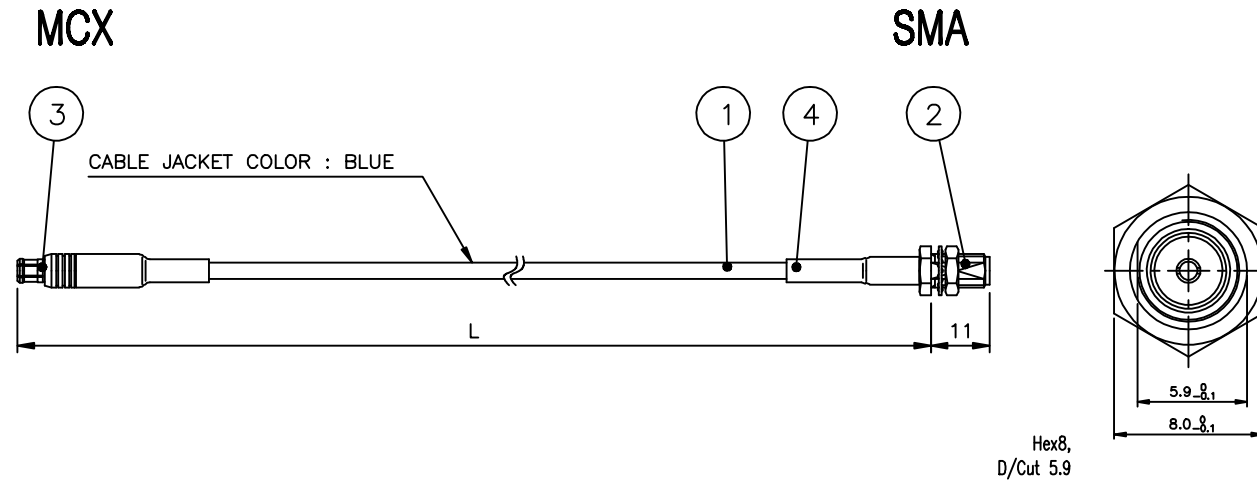

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 2-1. SMA50 JB(F/N) → BODY : Gold Plating
CONTACT : Gold Plating
 - 2-2. MCX50 PS → BODY : Gold Plating
CONTACT : Gold Plating
- Electrical Spec
 - 3-1. Impedance : 50Ω nominal
 - 3-2. Frequency Range : DC ~ 3GHz
 - 3-3. V.S.W.R. : 1.2 (Max)

	4	MARKING TUBE	2	LS TUBE	ATU00212-N/1	Ø4 20mm - White	
	3	CONNECTOR	1	KJ COMTECH	CN03937-7/1	MCX50 CABLE PS	
	2	CONNECTOR	1	KJ COMTECH	CN02939-7/1	SMA50 JB(F/N)	
	1	COAXIAL CABLE		EXPANTEL	ACA00185-N/1	FLS-08N(30Q)-8FS TC (BLUE)	
CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	REMARKS	
	DATE			2014. 11. 19.			
CUSTOMER CODE	APPROVED BY		I.C.KIM		KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 02-55-047-0015 Fax : 02-55-047-0017		
	CHECKED BY						
CABLE LENGTH TOLERANCE	DRAWN BY		S.M.LEE		TITLE CABLE ASS'Y		
	CHECKED BY						
	SCALE	UNIT					
	N/S	mm					
0 ~ 1000mm : +5, -0		A4 DWG NO. CF00971-7/1 DETAIL NO. REVISION I R SHEET 1 of 1					
1000 ~ 2000mm : +10, -0							
2000 ~ 3000mm : +15, -0							
3000 ~ 4000mm : +20, -0							
4000 ~ 5000mm : +25, -0							
5000 ~ : +10%							