

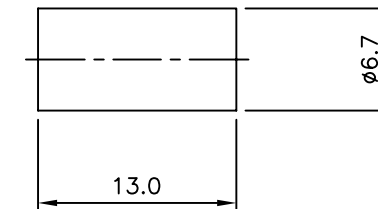


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2016.10.07.
1	BODY 길이 수정, CAP 고정 O-RING부 위치 수정	I.C.KIM		2016.10.31.

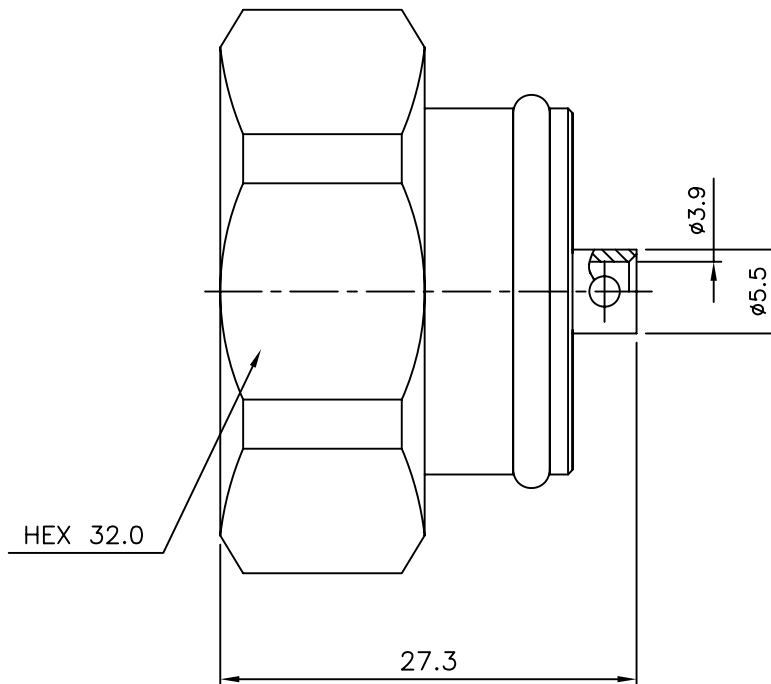


6	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02266-5/1
5	INSULATOR	1	TEFLON		DIN02644-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00205-5/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (5μm)	DCT03543-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD03997-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

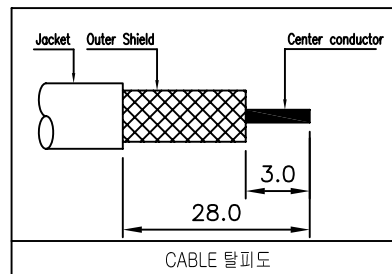

*ELECTRICAL SPEC

1. Frequency Range : DC ~ 3GHz
2. Impedance : 50Ω (Nominal)
3. V.S.W.R.(Max) : 1.2
4. PIMD : -160dBc (20Wx2Tone)
[CDMA / WCDMA 장비 기준]

TOLERANCE	Decimal	DATE 2016. 10. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 CABLE PS 141FJ
		DRAWN BY	I.C.KIM	
FINISH		SCALE	2/1	DWG NO. CN03466-7/3 REVISION 1 SHEET 1 of 1
		UNIT	mm	



A4