
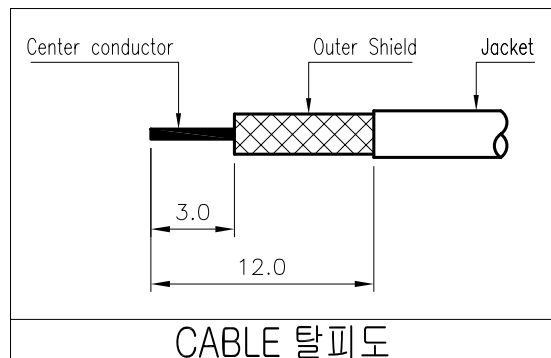



ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2

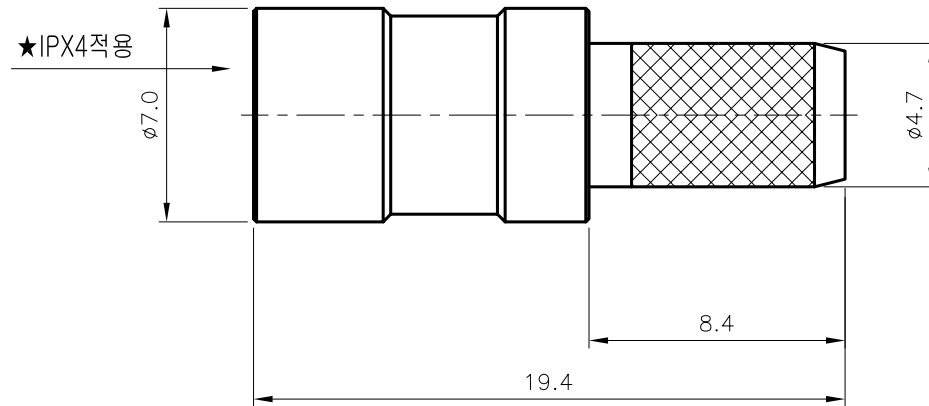

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.01.25.
1	설번처리No.201805-0013 [조립성 개선 BODY 내경 치수 수정]	S.Y.EUN	I.C.KIM	2018.05.21.
2	[설번No.201807-0005] 메이팅 개선으로 인한 GASKET 경도 변경 (경도60%→40%)	S.Y.EUN	I.C.KIM	2018.07.11.
3	[설번No.201809-0002] ASSY 작업 시 절연체 파손 및 핀 높이 불량 개선으로 인한 JACK 면체 및 핀 낙시바늘 추가	S.Y.EUN	I.C.KIM	2018.09.07.

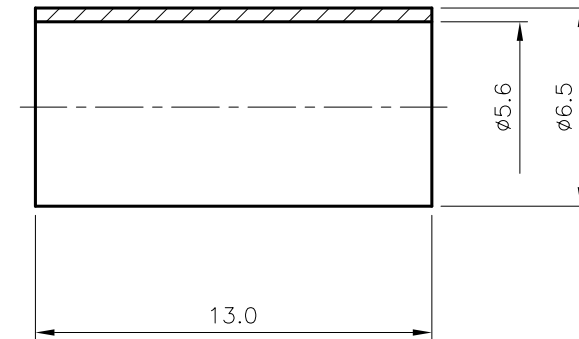

3	6	JACK	1	BeCu C17300	Nickel Plate	DJA00159-5/9
	5	INSULATOR	1	TEFLON		DIN02969-N/1
2	4	GASKET	1	SILICONE RUB		DGK00317-N/2 DGK00317-N/1
	3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00059-5/1
3	2	CONTACT	1	BeCu C17300	Gold Plate	DCT03918-5/1
1	1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04382-5/1
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 09. 07.		KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMBL50 CABLE JS 3D-FV
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. CN03763-7/2
		4/1	mm	
		A4		REVISION 3
				SHEET 1 of 1