


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED DIMENSION 26.8 -> 26.7	2004.04.23

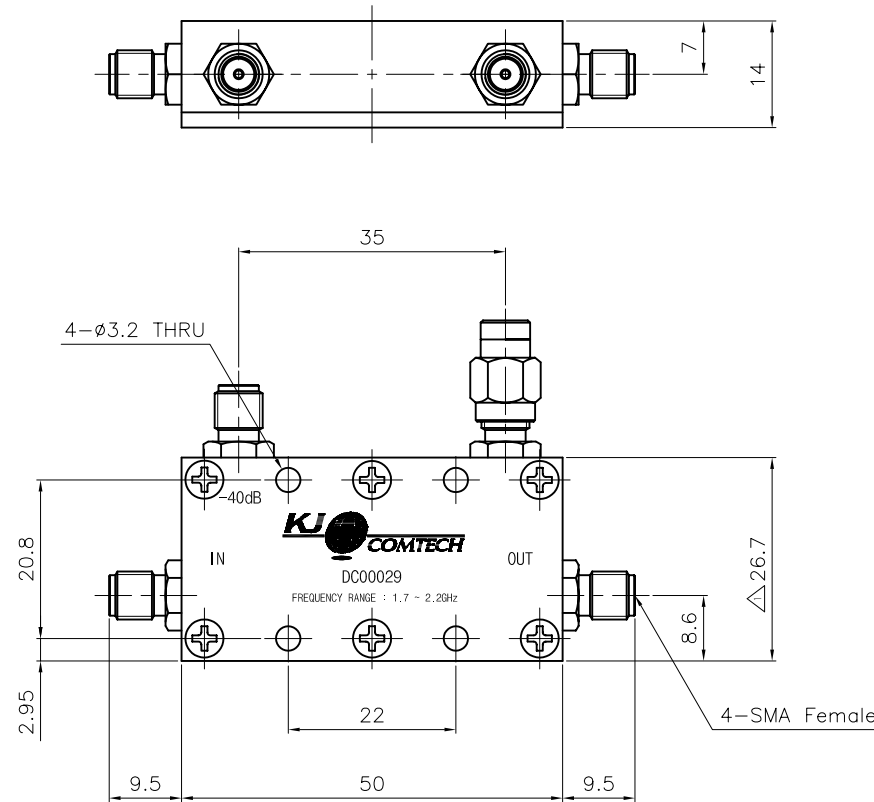

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1700.0 ~ 2200.0MHz

Coupling Value : 40dB $\pm$ 0.7dB

Insertion Loss (Max.) : 0.5dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Power Handling (Max.) : 100.0W

Impedance : 50 Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION	REV.A	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS	
TOLERANCE	Decimal	DATE		2004. 4. 23.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
	± 0.3	APPROVED BY							
	Angle	CHECKED BY							
MATERIAL		DRAWN BY		TITLE					
A6061 T6				40dB Directional Coupler					
FINISH	SCALE		UNIT		A4	DWG NO.	DC00029-7/1		
Yellow Chromate	1/1	mm	SHEET			1	OF	1	