


REVISION		
REV	DESCRIPTION	DATE
IR	최초 개정	2008.12.22.

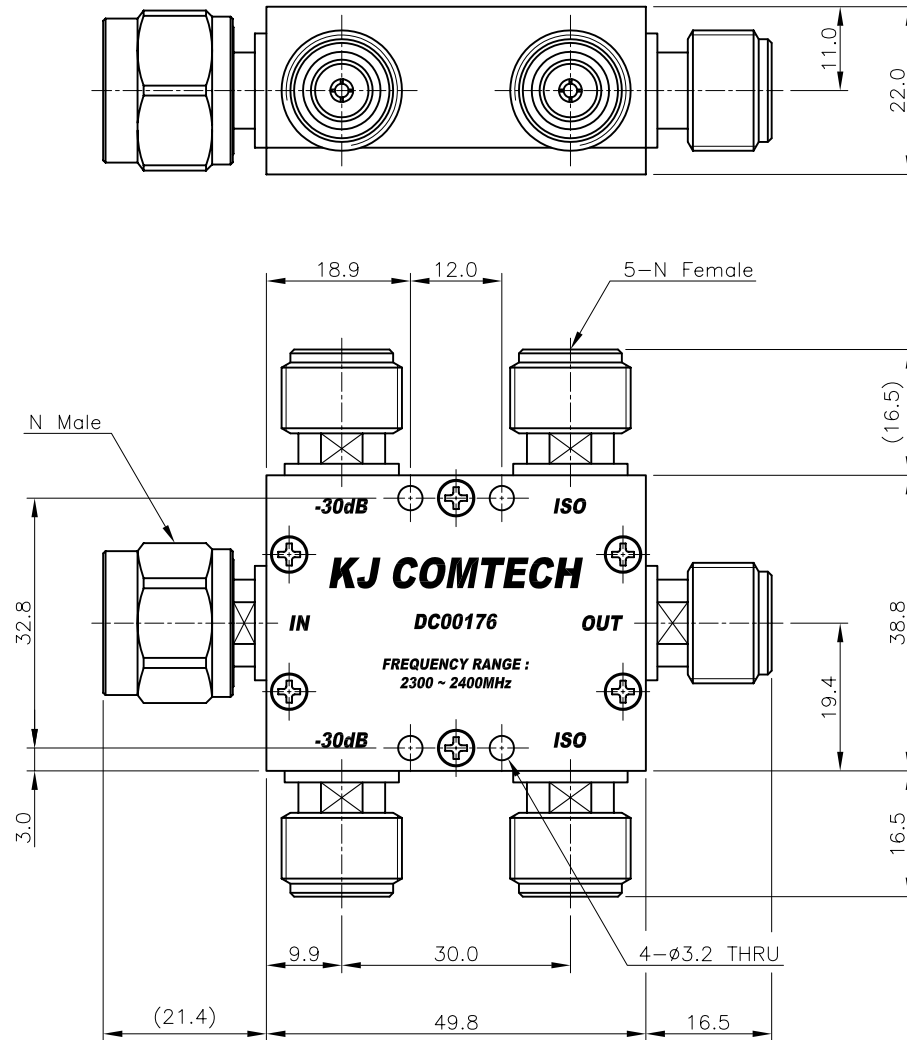

* ELECTRICAL SPECIFICATIONS

Frequency Range : 2300.0 ~ 2400.0MHz

Coupling Value : 30dB±0.5dB

Insertion Loss (Max.) : 0.3dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2008. 12. 22.				
	Angle	APPROVED BY	S.W.LEE			
MATERIAL	±1°	CHECKED BY	J.H.YOUN			TITLE
	A6061 T6	DRAWN BY	K.I.CHO			
FINISH	White Chromate	SCALE	UNIT	 A4		
		1/1	mm			
				DWG NO.	DC00176-7/1	
				REVISION	I R	SHEET 1 of 1