
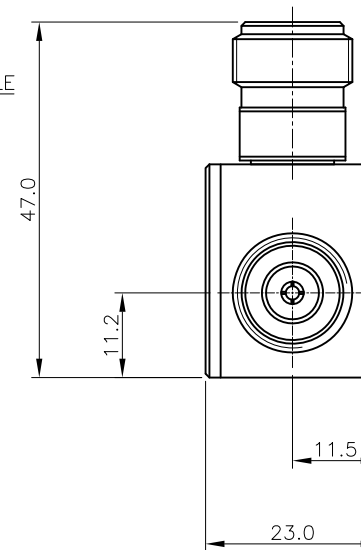


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2022.10.14.
2	P1 PORT Connector 변경 (Female=>Male)	K.S.KIM	S.L.SON	2023.01.05.

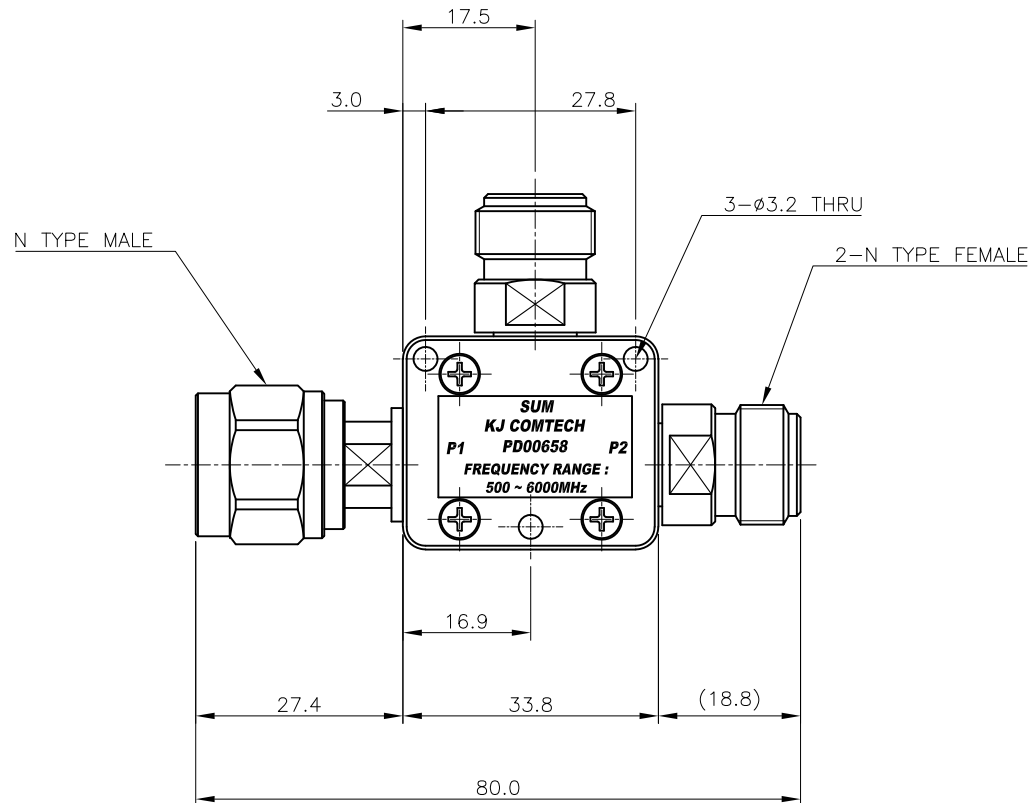

* ELECTRICAL SPECIFICATIONS

Frequency Range : 500~6000 MHz

Insertion Loss (Max.) : 6.5dB

V.S.W.R (Max.) : Input 1.4 : 1 Output 1.6 : 1

Flatness (Max.) : 0.35dB

Power Handling (Max.) : 1.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 White Chromate

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			2023. 01. 05.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.L.SON				
MATERIAL	±0.3	CHECKED BY	S.L.SON			TITLE	2WAY POWER DIVIDER
	±1°	DRAWN BY	K.S.KIM				
FINISH	A6061 T6	SCALE	UNIT		A4	DWG NO.	PD00658-7/2
	White Chromate	1/1	mm			REVISION	2