


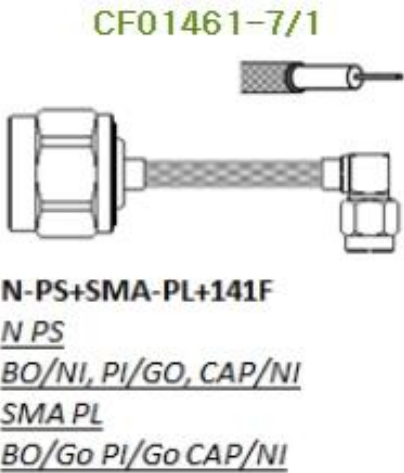

CF01461-7/1 150mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

150mm - S11/S22/S21 (SWR, SWR, dB)			
☒ 1.0GHz	- 1.02,	1.02,	0.10
☒ 2.0GHz	- 1.03,	1.04,	0.16
☒ 3.0GHz	- 1.03,	1.04,	0.20
☒ 4.0GHz	- 1.09,	1.06,	0.25
☒ 5.0GHz	- 1.11,	1.12,	0.28
☒ 6.0GHz	- 1.11,	1.07,	0.29

☒ 7.0GHz	- 1.09,	1.13,	0.49
☒ 8.0GHz	- 1.40,	1.41,	0.53

- ▶ NETWORK ANALYZER

☒ E5071B (~8.5GHz)

☐ ZVA50 (~50GHz)
- ▶ Test cable

☒ N Male to SMA Male

10GHz Cable (CF00540-7/1)
- ▶ Test Adaptor

☒ SMA (J) SMA (J) ST

AD00006-7/2

☒ N (J) SMA (J) AD00424-7/1

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

