
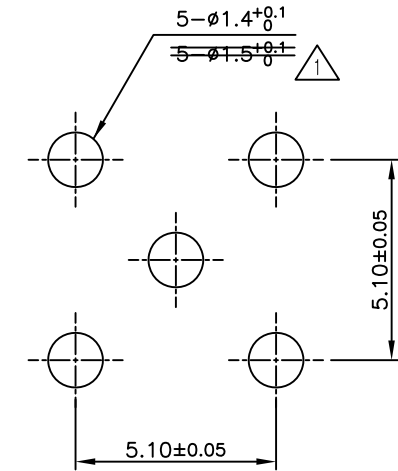
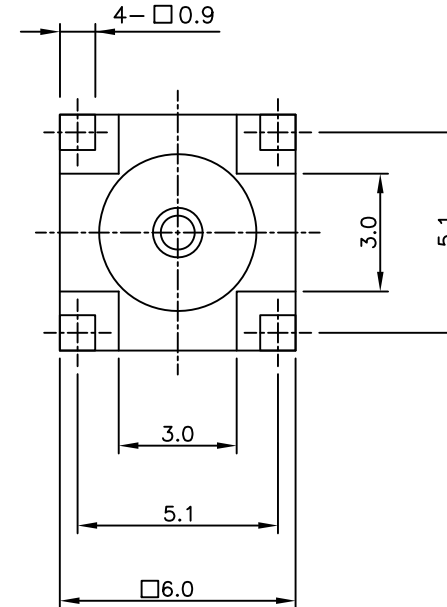


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	H.J.LEE	I.C.KIM	2015.03.09.
1	PCB Mounting hole size 수정	I.C.KIM		2019.12.27.

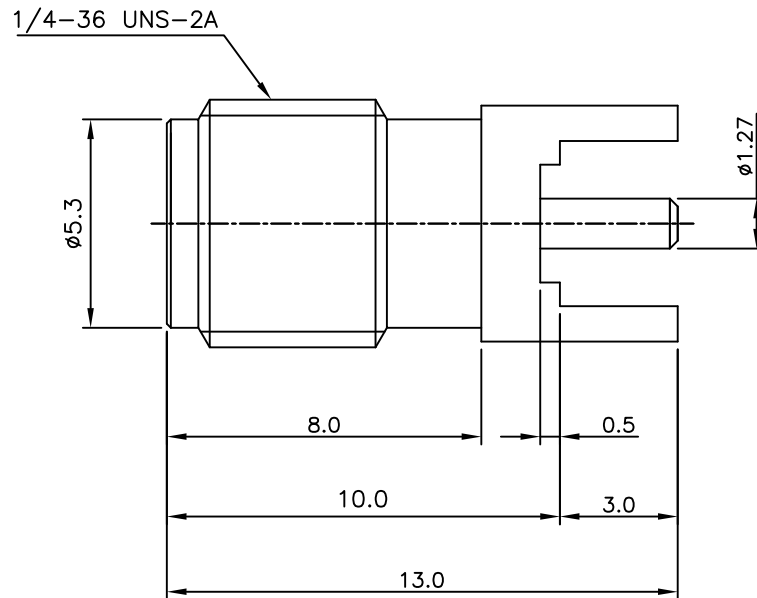

PCB MOUNTING HOLE

ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS Min.
5. INSULATION RESISTANCE : 5000MΩ
6. CENTER CONTACT RESISTANCE : ≤ 3mΩ
7. OUTER CONTACT RESISTANCE : ≤ 2.5mΩ

3	INSULATOR	1	PTFE	White	DIN00090-N/1
2	CONTACT	1	Beryllium Copper	Gold Plate	DCT00204-5/1
1	BODY	1	BRASS	Gold Plate	DBD03903-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2019. 12. 27.			 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY					
MATERIAL -		CHECKED BY			PART DESCRIPTION SMA50 JS-4R-R		
		DRAWN BY I.C.KIM					
FINISH -		SCALE 5/1	UNIT mm		A4	PART NO. CN03310-7/2	
						REVISION 1	SHEET 1 of 1