
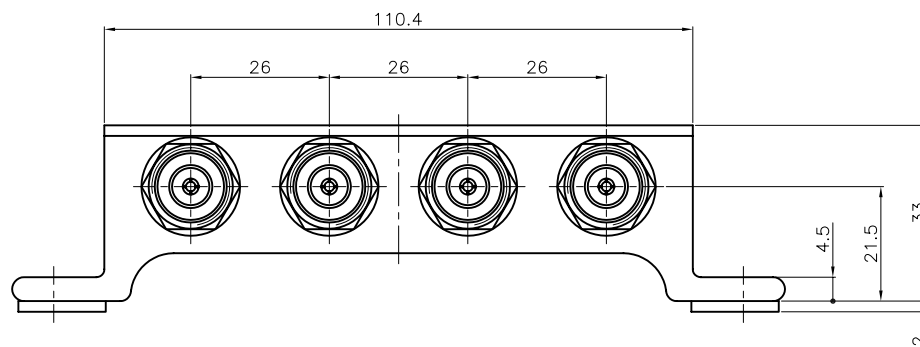
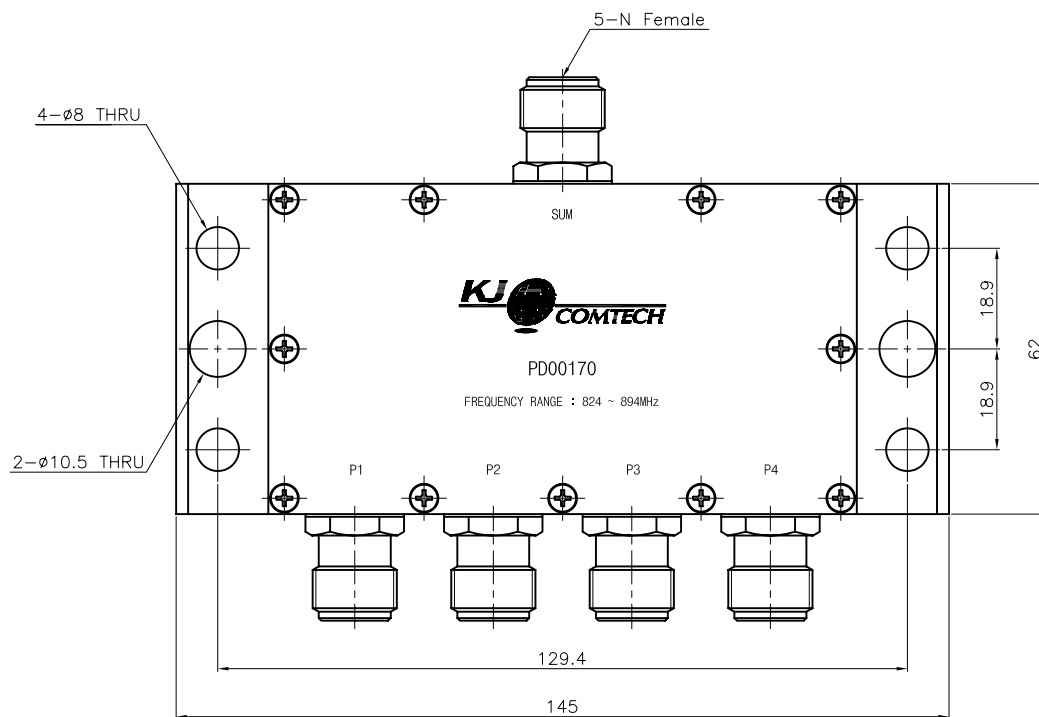


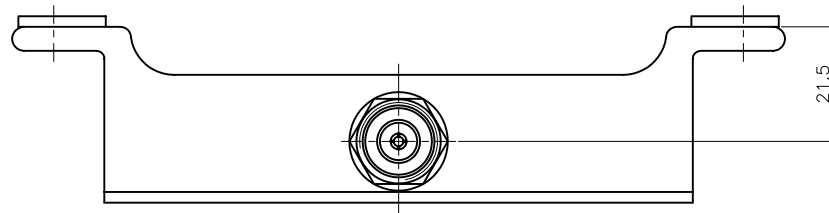

REVISION		
REV	DESCRIPTION	DATE
△		
△		

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 824.0 ~ 894.0MHz
 Insertion Loss (Max.) : 7.0dB
 V.S.W.R (Max.) : 1.3 : 1
 Isolation (Min.) : 25.0dB
 Power Handling (Max.) : 5.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (SUCO Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE				 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.5	2005. 1. 31.							
	Angle	APPROVED BY							
MATERIAL	± 1°	CHECKED BY				TITLE			
		DRAWN BY							
A6061 T6						4WAY POWER DIVIDER			
FINISH		SCALE	UNIT	A3 DWG NO. PD00170-7/1 SHEET 1 OF 1					
Yellow Chromate		1/1	mm						