


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.02.11.
2	Bracket 추가 및 주파수 대역 변경	S.L.SON	J.H.YOUN	2015.10.01.

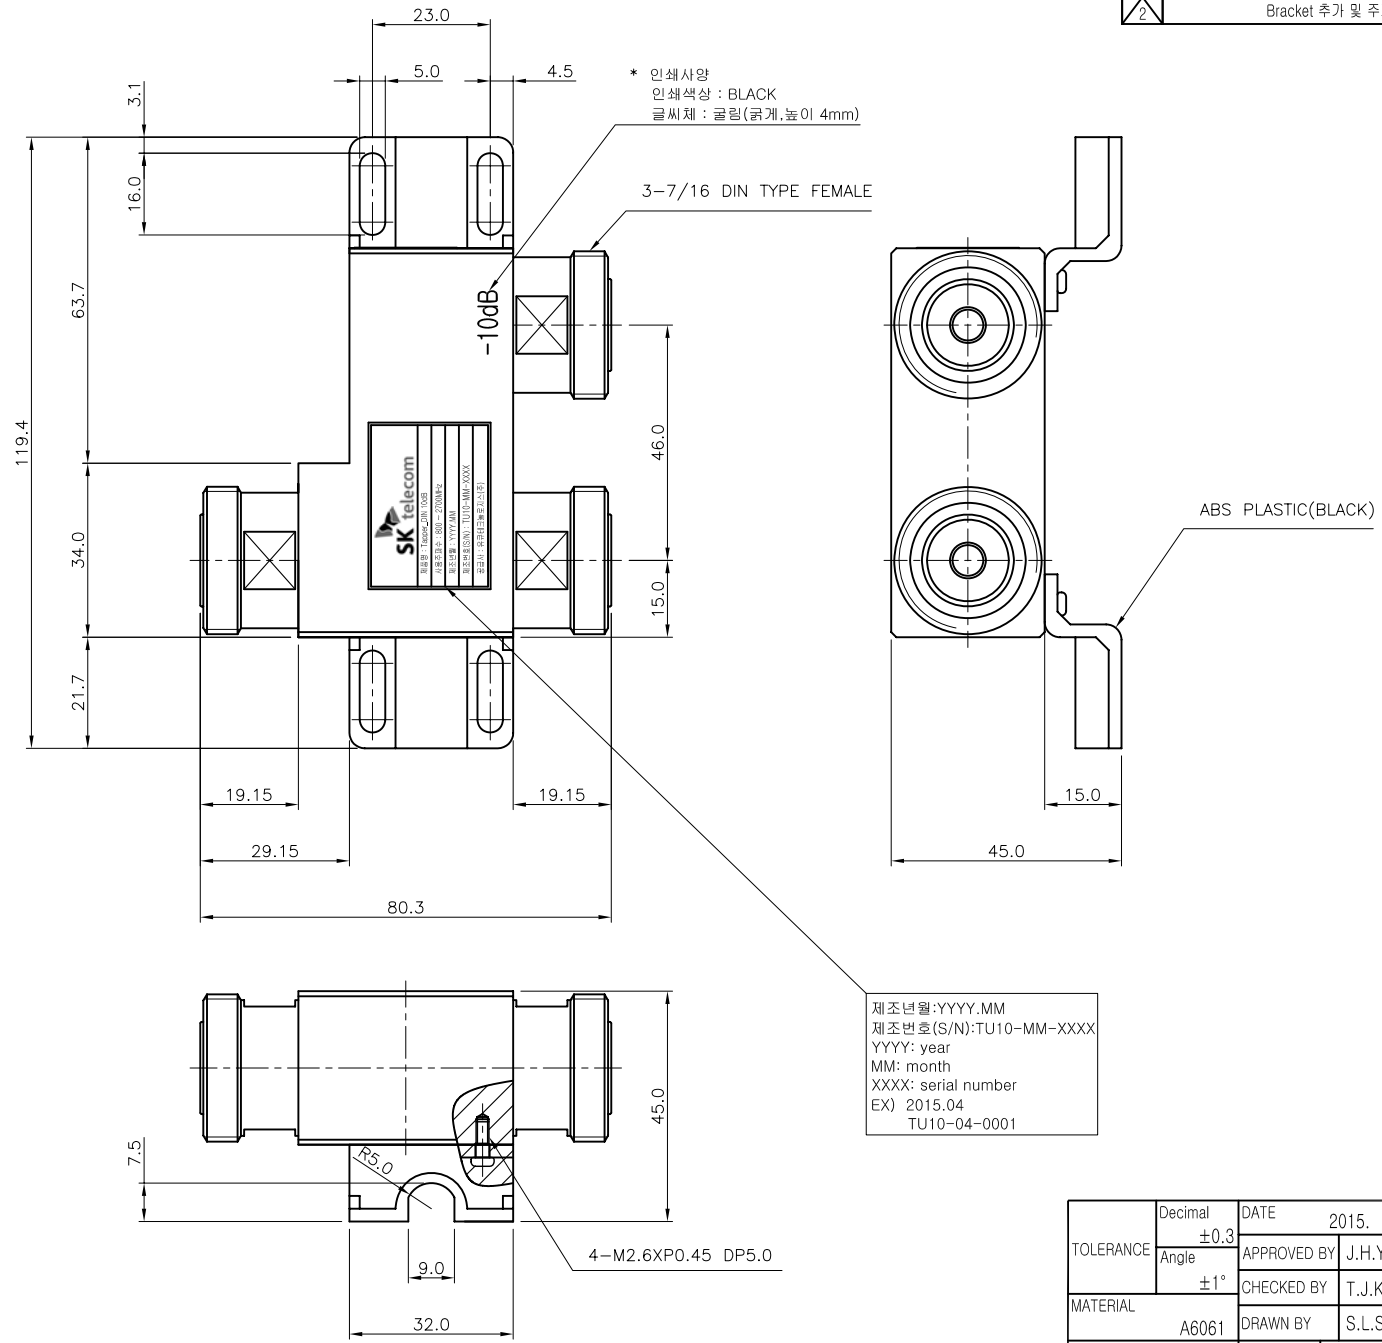

* ELECTRICAL SPECIFICATIONS
Frequency Range : 700.0 ~ 2700.0MHz
Tap Loss (Input <-> P2) : 10.0±0.8dB
Insertion Loss (Input <-> P1): 1.0dB(Max)
Input V.S.W.R (Max.) : 1.35 : 1
PIM (@43.0dBm 2Tone) : -155.0dBc
Power Handling (Max.) : 100.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

제조년월:YYYY.MM
제조번호(S/N):TU10-MM-XXXX
YYYY: year
MM: month
XXXX: serial number
EX) 2015.04
TU10-04-0001

TOLERANCE	Decimal ±0.3	DATE	2015. 10. 01.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061	CHECKED BY	T.J.KIM	TITLE 10dB POWER TAPPER
		DRAWN BY	S.L.SON	
FINISH	DIC-547	SCALE	1/1	DWG NO. TP00008-8/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	