
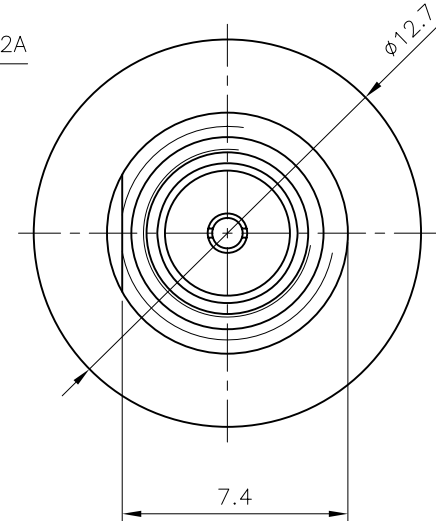


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
IR	Initial Registration					1998.08.24.
1	[설번No.201303-0023] 신뢰성 향상 (낙시바늘 추가)			E.H.KIM	I.C.KIM	2013.03.21.

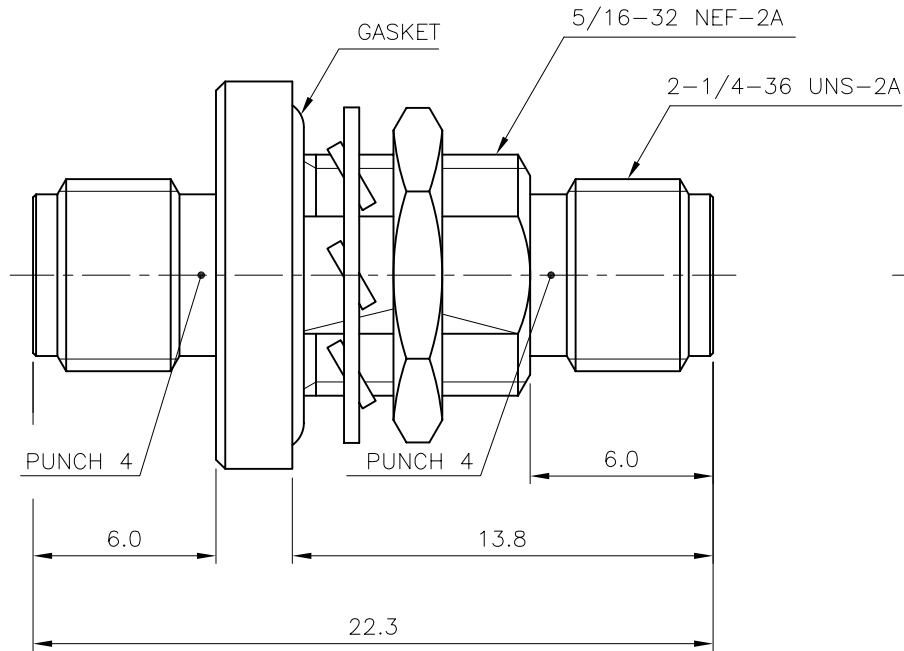

▶ 전기적 특성

1. IMPEDANCE : 50Ω NOMINAL
2. FREQUENCY RANGE : DC ~ 18GHz
3. V.S.W.R : 1.25 : 1 max

6	WASHER	1	BsS	Gold Plate	DWA00009-5/1
5	NUT	1	MBsBD	Gold Plate	DNT00031-5/1
4	INSULATOR	2	TEFLON		DIN00127-N/2 DIN00127-N/1
3	GASKET	1	SILICONE		DGK00026-N/1
2	CONTACT	1	BeCu	Gold Plate	DCT00087-5/1
1	BODY	1	MBsBD	Gold Plate	DBD00111-5/2 DBD00111-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 03. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMA50 (J) SMA50 (J) BH ADAPTOR
		DRAWN BY	E.H.KIM	
FINISH		SCALE	4/1	DWG NO. AD00020-7/2
		UNIT	mm	REVISION 1 SHEET 1 of 1