
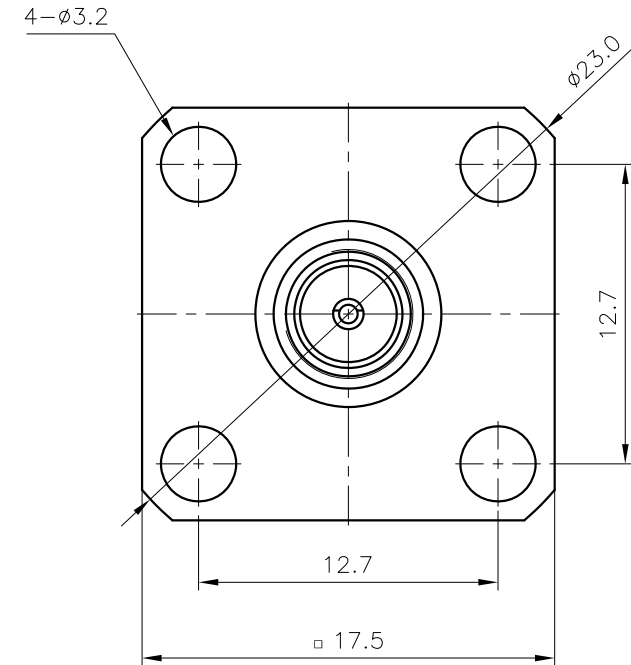


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
1R	Initial Registration			2001.12.28.	
1	[설번No.201303-0018] 신뢰성 향상 (뉘시바늘 추가)	E.H.KIM	I.C.KIM	2013.03.19.	

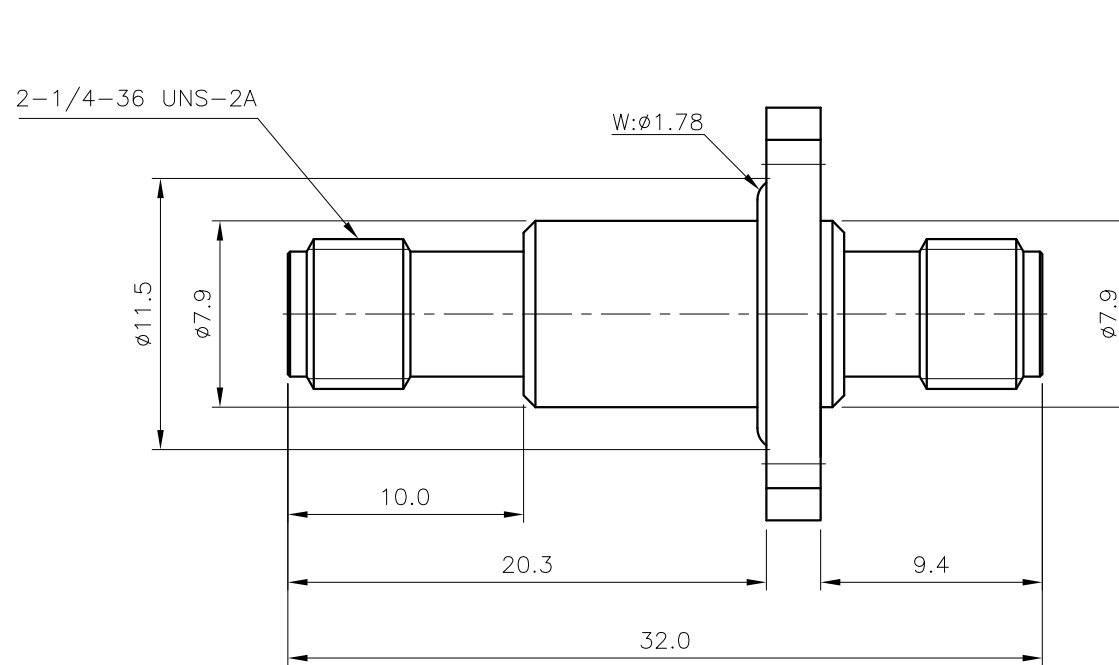

전기적 특성

1. IMPEDANCE : 50Ω NOMINAL
2. FREQUENCY RANGE : DC ~ 18GHz
3. V.S.W.R (Max) : 1.2 @ ~9GHz
1.3 @ ~18GHz

1	4	INSULATOR	2	TEFLON		DIN00127-N/2 DIN00127-N/1
	3	GASKET	1	SILICONE		DGK00026-N/1
	2	CONTACT	1	BeCu	Gold Plate	DCT00086-5/1
1	1	BODY	1	MBsBD	Gold Plate	DBD00117-5/2 DBD00117-5/1
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2013. 03. 19.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY I.C.KIM				
MATERIAL _____	CHECKED BY				TITLE SMA50 (J) SMA50 (J) H4 ADAPTOR	
	DRAWN BY	E.H.KIM				
FINISH _____	SCALE 3/1	UNIT mm		A4	DWG NO.	AD00029-7/2
					REVISION	1