


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1A	Initial Registration	S.H.KIM		2023.08.10.
1	특성 개선 절연체 및 바디 내부 길이 수정	S.H.KIM		2023.08.30.

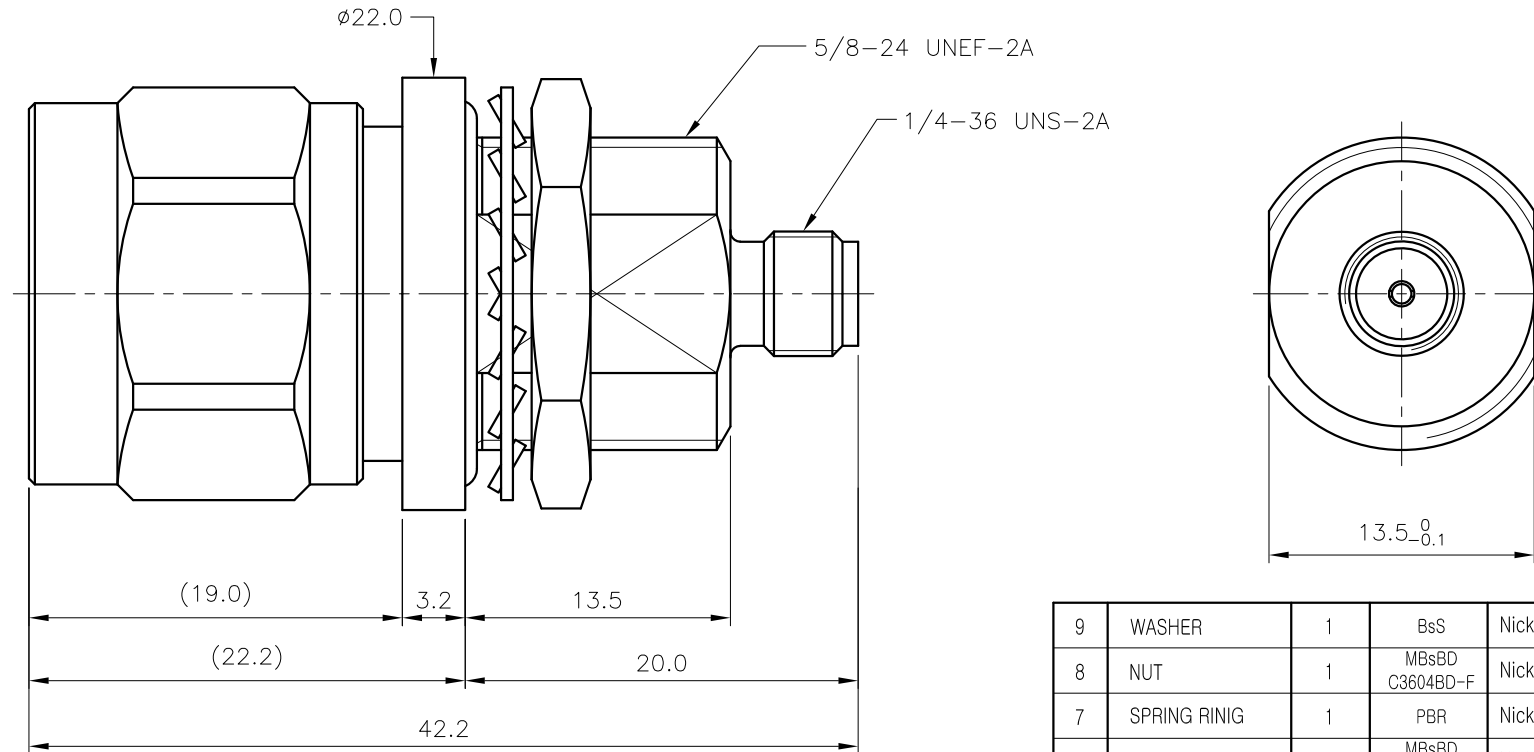

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm (Nominal)
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Max) : -0.3dB

9	WASHER	1	BsS	Nickel Plate	DWA00045-5/1
8	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00033-5/1
7	SPRING RINIG	1	PBR	Nickel Plate	DSR00020-5/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
5	INSULATOR	1	TEFLON		DAI02506-N/1
4	GASKET	1	SILICONE RUB	Red	DGK00013-N/1
3	GASKET	1	NBR	Black	DGK00046-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03413-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00465-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 08. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY				
MATERIAL _____		CHECKED BY			TITLE N50 (P) SMA50 (J) B/H ADAPTOR	
		DRAWN BY S.H.KIM				
FINISH _____		SCALE 2.5/1	UNIT mm		A4	DWG NO. AD00330-7/2
					REVISION 1	SHEET 1 of 1