


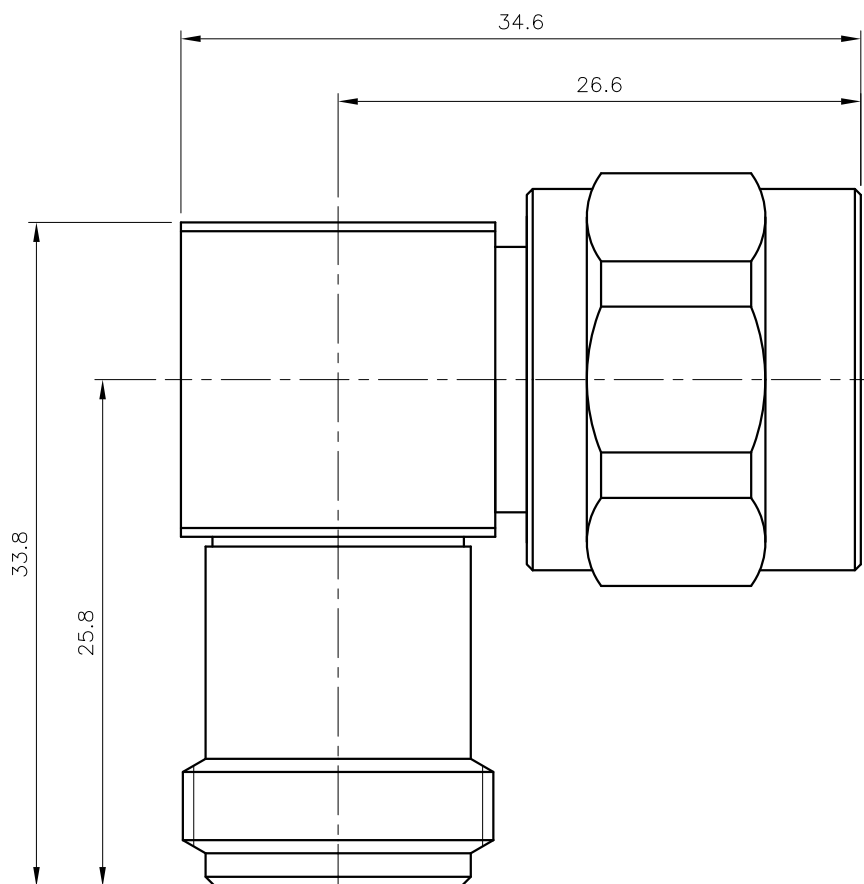

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	M.H.SONG	I.C.KIM	2013.09.27.
1	AB/용접 → A+B/용접 구조 변경	S.Y.EUN	I.C.KIM	2020.12.23.

* ELECTRICAL DATA

1	Frequency range	DC ~ 6 GHz	
2	IMPEDANCE	50Ω NOMINAL	
3	V.S.W.R	1.2 : 1 max	
4	Insertion Loss	-0.15dB min	
5	PIMD (-43dBm / 2 tone)	CDMA (869~894MHz)	-150dBc max
		WCDMA (2110~2170MHz)	-150dBc max

10	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
9	COVER	1	MBsBD	SUCO Plate	DCO00090-5/2
8	CAP	1	MBsBD	SUCO Plate	DCU00063-5/1
7	INSULATOR	1	TEFLON		DIN01803-N/1
6	INSULATOR	1	TEFLON		DIN00643-N/1
5	GASKET	1	NBR		DGK00176-N/1
4	GASKET	1	SILICONE RUB		DGK00013-N/1
3	CONTACT	1	BeCu	Silver 3.0μm	DCT02294-5/2
2	CONTACT	1	MBsBD	Silver 3.0μm	DCT02293-5/2
1	1-2 BODY (B)	1	MBsBD	SUCO 3.0μm	DBD02780-1/2
	1-1 BODY (A)	1	MBsBD	SUCO 3.0μm	DBD02779-1/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	2020. 12. 23.					
MATERIAL	±0.2	APPROVED BY	I.C.KIM		TITLE		
	±1°	CHECKED BY					
FINISH	_____	DRAWN BY	S.Y.EUN		N50 (J) N50 (P) RA ADAPTOR		
	_____	SCALE	UNIT				
		3/1	mm		DWG NO.	AD00435-7/2	
				REVISION	1	SHEET	1 of 1