


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	C.K.KIM	I.C.KIM	2016.05.13.

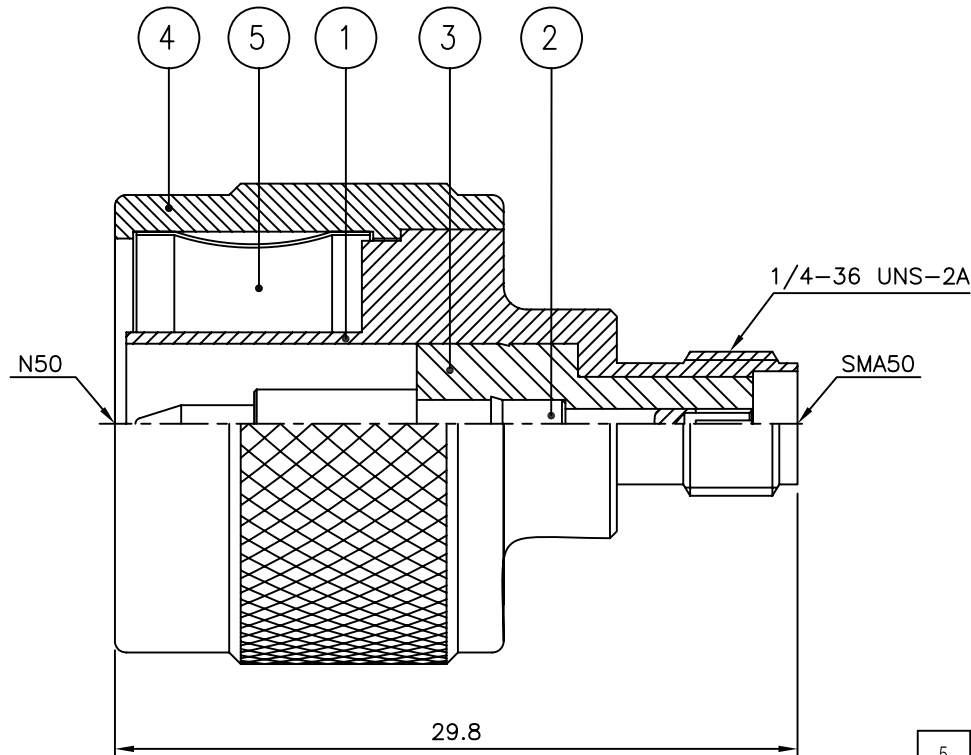

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~5GHz

V.S.W.R : 1.25 : 1 (max)

Insertion Loss : -0.5dB

5	SPRING	1	BeCu C17300	Nickel Plate	DSR01106-5/1
4	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02201-5/1
3	INSULATOR	1	TEFLON		DAI00015-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00027-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00312-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2016. 05. 13.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	H.J.LEE	KJ COMTECH CO.,LTD. TITLE N50 (P) SMA50 (J) ST NP PUSH-ON
		DRAWN BY	C.K.KIM	
FINISH		SCALE	UNIT	DWG NO. AD00457-7/2 REVISION I R SHEET 1 of 1
		3/1	mm	

A4