


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	H.J.LEE	I.C.KIM	2016.04.25.

* 조립순서

- 1번 BODY에 8번 CAP을 조립한다.
- CAP을 조립한 BODY에 5번 GASKET을 끼워 넣어 CAP을 고정한다
- 1번 BODY와 2번 BODY를 억지 끼움 한다.
- 1번 BODY에 7번 TEFLON, 3번 PIN 순서대로 조립한다.
- 2번 BODY에 6번 TEFLON, 4번 PIN 순서대로 조립한다.
(조립 시 CUTTING 방향 맞춰 조립 할 것)
- 조립된 PIN에 납땜 작업한다.
- COVER 조립한다.

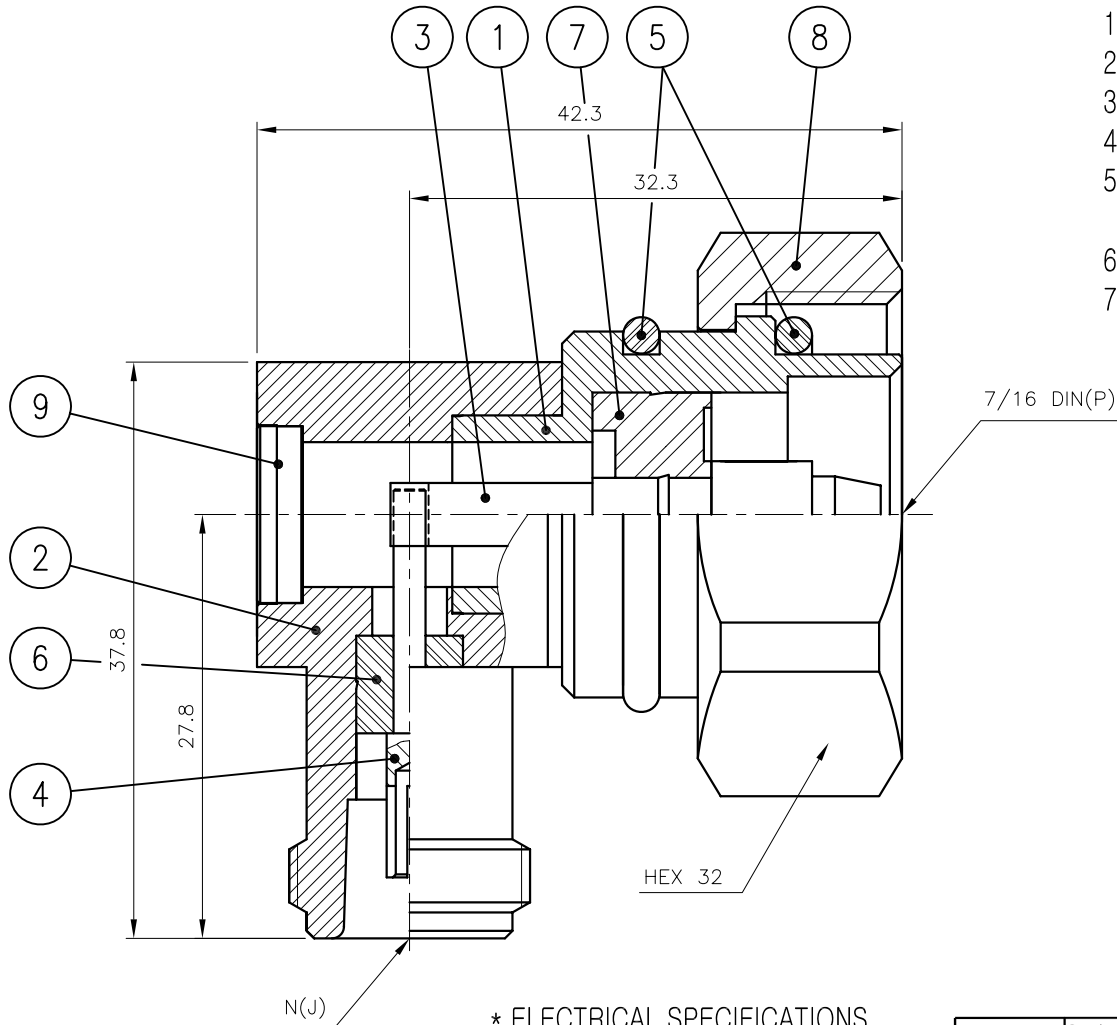

* ELECTRICAL SPECIFICATIONS

- Impedance : 50Ω
- Frequency Range : DC~4GHz
- V.S.W.R (Max) : 1.2
- Insertion Loss (Min): -0.2dB

9	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00107-5/1
8	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02266-5/1
7	INSULATOR	1	TEFLON		DIN02760-N/1
6	INSULATOR	1	TEFLON		DIN02761-N/1
5	GASKET	2	SILICONE RUB		DGK00054-N/1
4	CONTACT	1	BeCu C17300	Silver $5\mu\text{m}$ Plate	DCT03687-5/1
3	CONTACT	1	MBsBD C3604BD-F	Silver $5\mu\text{m}$ Plate	DCT03686-5/1
2	BODY (B)	1	MBsBD C3604BD-F	SUCO Plate	DBD04158-5/1
1	BODY (A)	1	MBsBD C3604BD-F	SUCO Plate	DBD04159-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2016. 04. 25.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 (P) N50 (J) RA ADAPTOR
		DRAWN BY	H.J.LEE	
FINISH		SCALE	UNIT	DWG NO. AD00578-7/1 REVISION I R SHEET 1 of 1
		2/1	mm	