
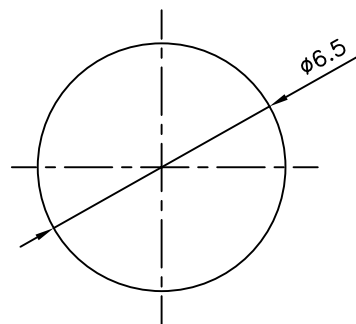
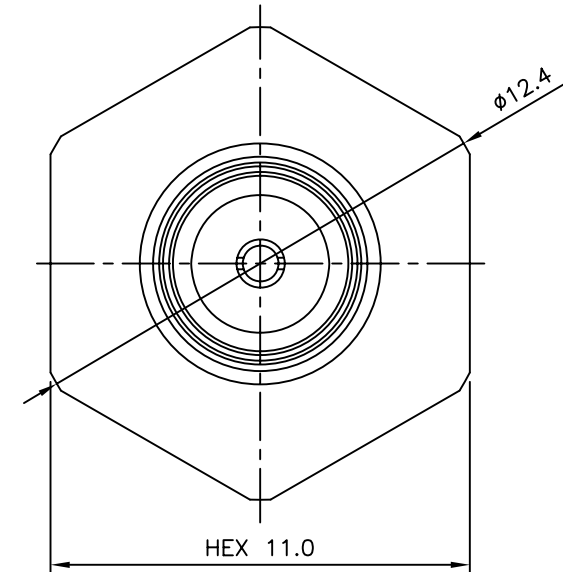


REVISION					
REV	DESCRIPTION			DRAWN	APPR
IR	Initial Registration			S.Y.EUN	I.C.KIM
					DATE
					2017.06.13.

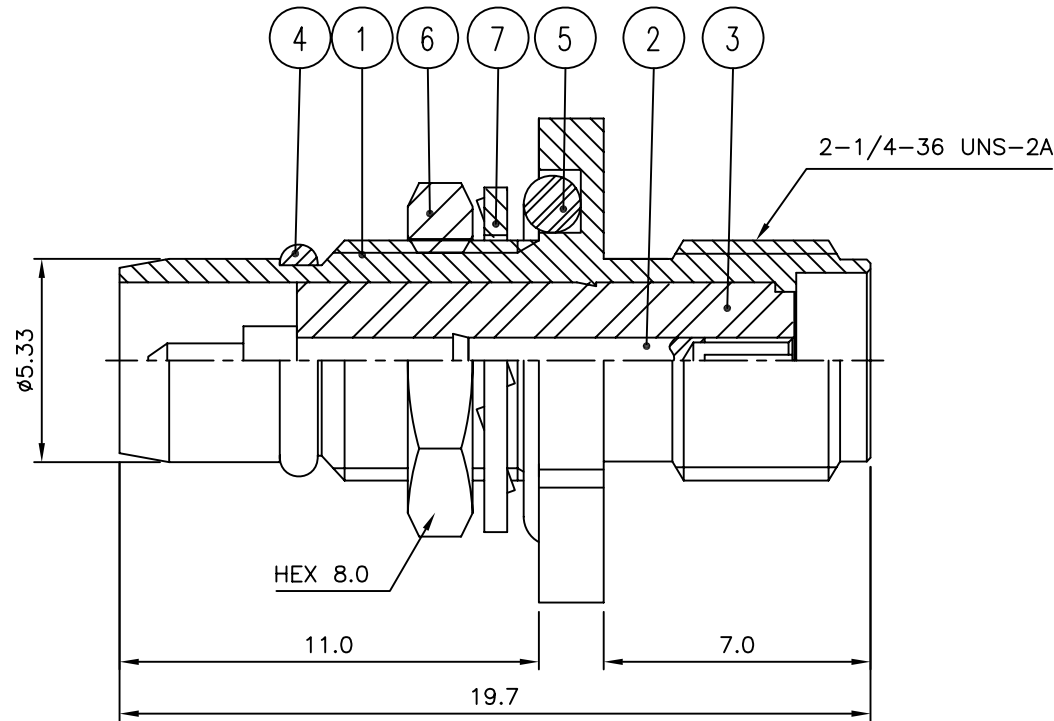

MOUNTING HOLE SIZE

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)

7	WASHER	1	BsS	Nickel Plate	DWA00005-5/3
6	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00025-5/5
5	GASKET	1	SILICONE RUB		DGK00021-N/1
4	GASKET	1	SILICONE RUB		DGK00017-N/1
3	INSULATOR	1	TEFLON		DIN01980-N/2
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03278-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00288-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 06. 13.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE BMA50(PB) - SMA50(J) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	DWG NO. AD00613-7/1 REVISION IR SHEET 1 of 1
		UNIT	mm	