


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
IR	Initial Registration			S.Y.EUN	I.C.KIM	2017.06.21.

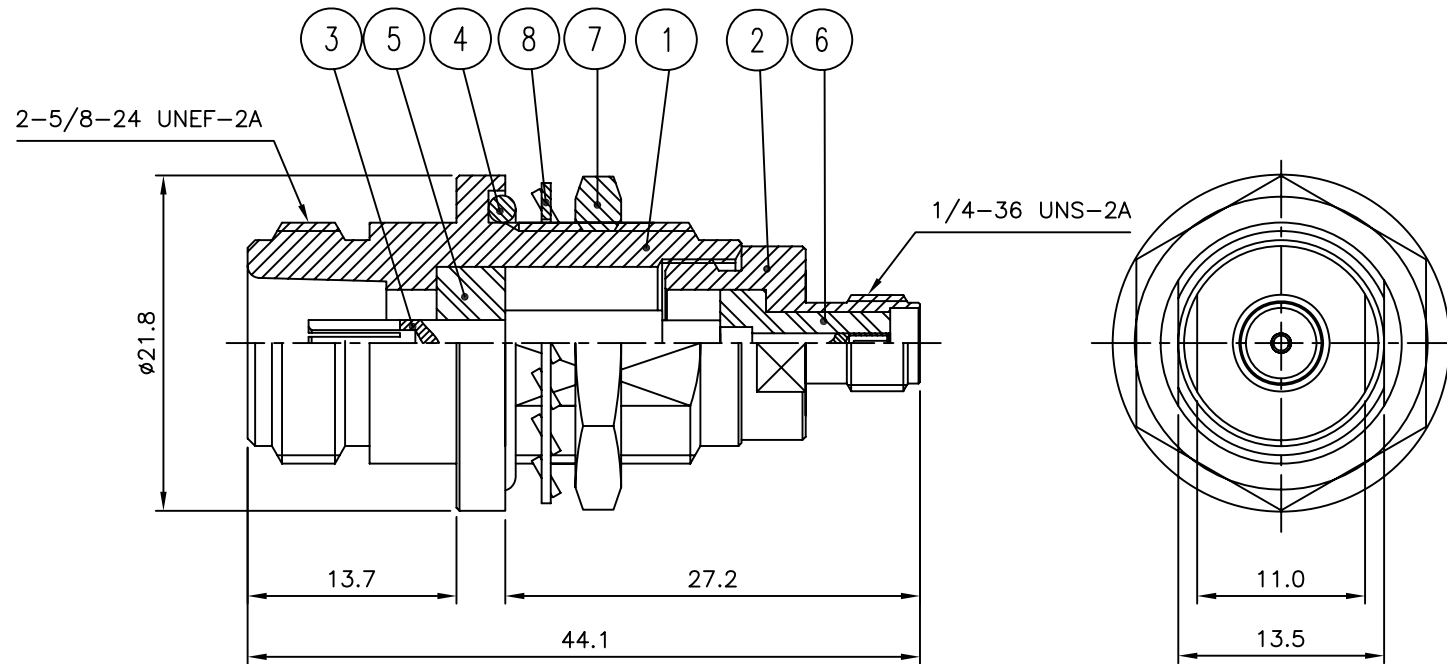

* ELECTRICAL SPEC

1. FREQUENCY RANGE : DC~6GHz
2. IMPEDANCE : 50ohm (Nominal)
3. VSWR (Max) : 1.25
4. INSERTION LOSS (Max) : 0.2

8	WASHER	1	BsS	Nickel Plate	DWA00045-5/1
7	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00033-5/1
6	INSULATOR	1	TEFLON		DIN02915-N/1
5	INSULATOR	1	TEFLON		DIN02914-N/1
4	GASKET	1	SILICONE RUB		DGK00045-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DAC03279-5/1
2	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04333-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04332-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 06. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50 (J) SMA (J) BH ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	2/1	A4 DWG NO. AD00614-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	