


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.01.12.
1	[실변No.201807-0005] 메이팅 개선으로 인한 GASKET 경도 변경 (경도60%→40%)	S.Y.EUN	I.C.KIM	2018.07.11.

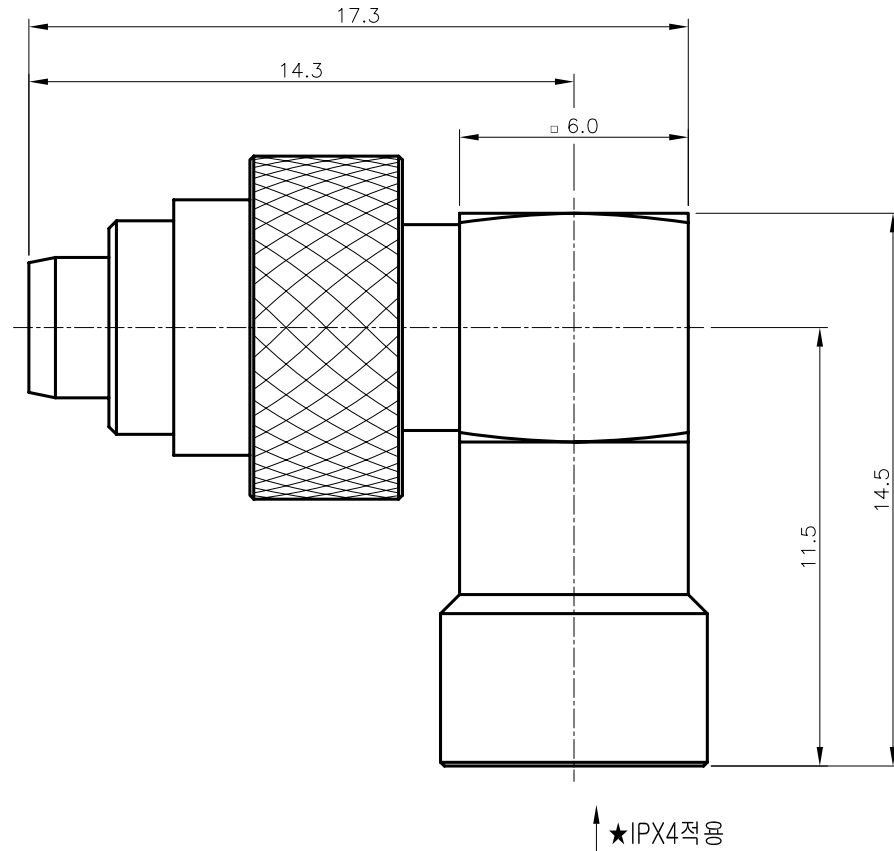

ELECTRICAL DATA

1	Frequency range	DC ~ 3.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min

- 방수 : IPX4 규격 적용

11	SPRING	1	SUS	Passivate	DSR01102-5/1
10	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02233-5/2
9	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00111-5/1
8	JACK	1	BeCu C17300	Nickel Plate	DJA00159-5/9
7	GASKET	1	SILICONE RUB		DGK00317-N/2 DGK00317-N/1
6	INSULATOR	1	TEFLON		DIN02969-N/1
5	INSULATOR	1	TEFLON		DIN02021-N/1
4	CONTACT	1	BeCu C17300	Gold Plate	DCT03911-5/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03910-5/1
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04378-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03088-5/5
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 07. 11.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	_____	CHECKED BY	_____	KJ COMTECH CO.,LTD. TITLE SMBL50 (J) SMBL50 (P) RA
		DRAWN BY	S.Y.EUN	
FINISH	_____	SCALE	5/1	DWG NO. AD00631-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	



A4