



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.03.06.

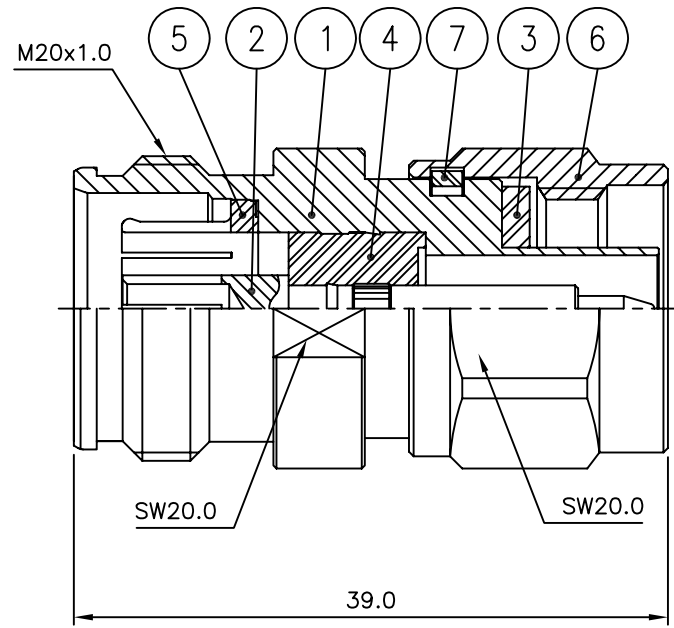

- ELECTRICAL DATA :
- 1. IMPEDANCE : 50ohm (Nominal)
 - 2. FREQUENCY RANGE : DC~3GHz
 - 3. VSWR (Max) : 1.2
 - 4. INSERTION LOSS (Max) : 0.3dB
 - 5. PIMD (-43dBm / 2tone) 3rd Order IMD :-160dBc (Min)

7	C-RING	1	PBR	Nickel Plate	DSR00020-5/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
5	JACK	1	MBsBD C3604BD-F	Silver Plate (3μm)	DJA00228-5/3
4	INSULATOR	1	TEFLON		DIN02977-N/1
3	GASKET	1	SILICONE RUB		DGK00013-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (3μm)	DAC03301-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DAD00361-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 03. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE 4.3/10 DIN50 (J) N50(P) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. AD00639-7/1 REVISION I R SHEET 1 of 1
		2/1	mm	



A4