


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2018.11.14.
1	GASKET 제거 및 I/L 특성 개선 PIN 도금두께 변경	I.C.KIM		2019.02.12.

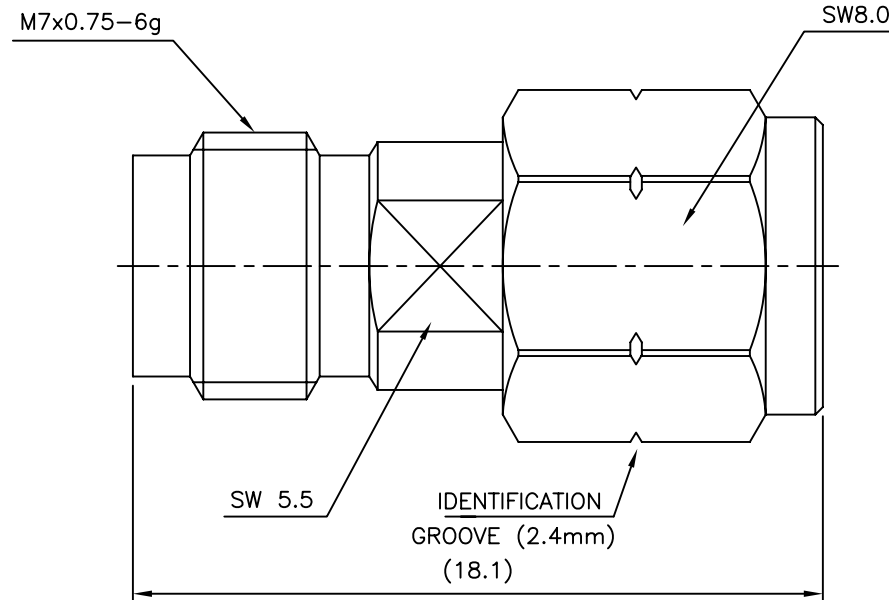

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~50GHz
3. VSWR (Max) : 1.25

7	SPRING RING	1	SUS303	Passivate	DSR00002-5/1
6	CAP	1	SUS303	Passivate	DCU02297-5/2
5	INSERT	1	SUS303	Passivate	DIS00283-5/F
4	INSULATOR	1	PEEK		DIN02989-N/8
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	BeCu C17300	Gold Plate 1.3μm	DAC03304-5/8
1	BODY	1	SUS303	Passivate	DAD00365-5/5
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 12.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle	APPROVED BY				
MATERIAL	±1°	CHECKED BY			TITLE 2.4mm (J) 2.4mm (P) ST ADAPTOR	
	_____	DRAWN BY I.C.KIM				
FINISH	_____	SCALE 5/1	UNIT mm		A4	DWG NO. AD00642-7/4
						REVISION 1