
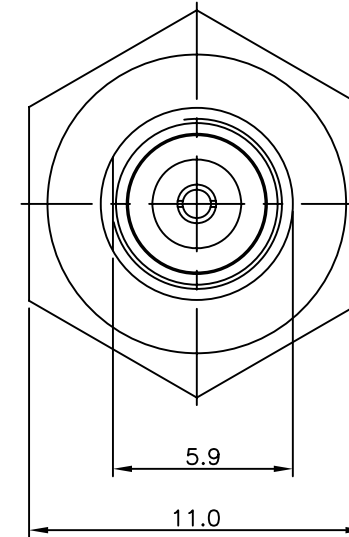


REVISION					
REV	DESCRIPTION			DRAWN	APPR
IR	Initial Registration			S.Y.EUN	I.C.KIM
					DATE
					2019.06.12.

2-1/4-36 UNS-2A

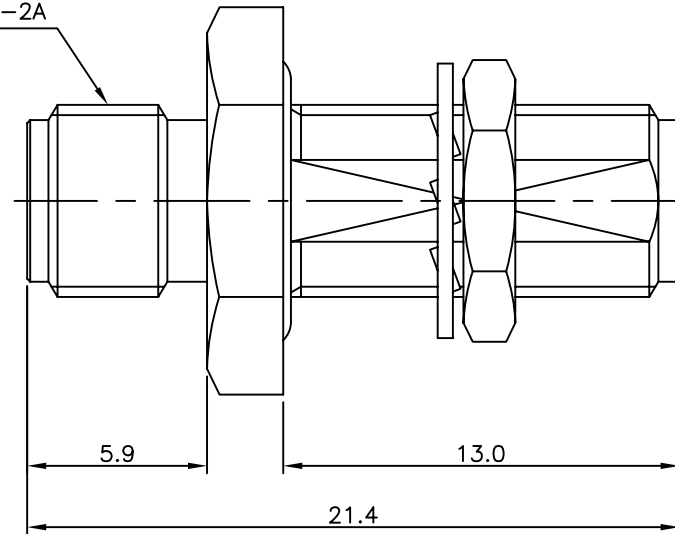

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

7	WASHER	1	BsS	Nickel Plated	DWA00005-5/3
6	NUT	1	SUS303	Passivate	DNT00065-5/1
5	GASKET	1	SLICONE RUB		DGK00023-N/1
4	INSERT	1	SUS303	Passivate	DIS00283-5/G
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	BeCu C17300	Gold Plate 1.3μm	DAC03328-5/1
1	BODY	1	SUS303	Passivate	DAD00384-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 06. 12.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.92mm (J) 2.92mm (J) BH ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	DWG NO. AD00671-7/1
		UNIT	mm	REVISION I R
				SHEET 1 of 1

A4