



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.08.19.
1	네임펜 마킹 처리 (파란색)	S.H.KIM		2023.02.20.

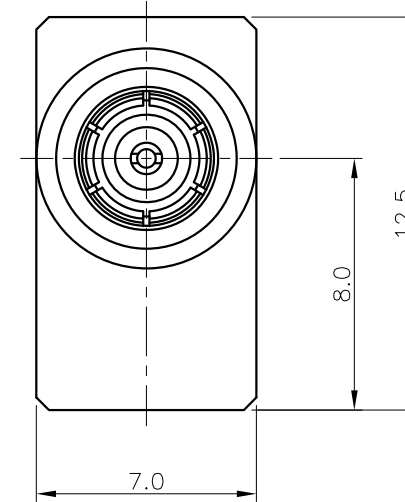

9	SPRING RING	1	SUS	Passivated	DSR00002-5/1
8	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
7	JACK	1	MBsBD C3604BD-F	Nickel Plate	DJA00159-5/E
6	GASKET	1	SILICONE RUB		DGK00004-N/1
5	INSULATOR	1	TEFLON		DIN02969-N/2
4	INSULATOR	1	TEFLON		DIN02133-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DAC03332-5/2
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04826-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04825-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

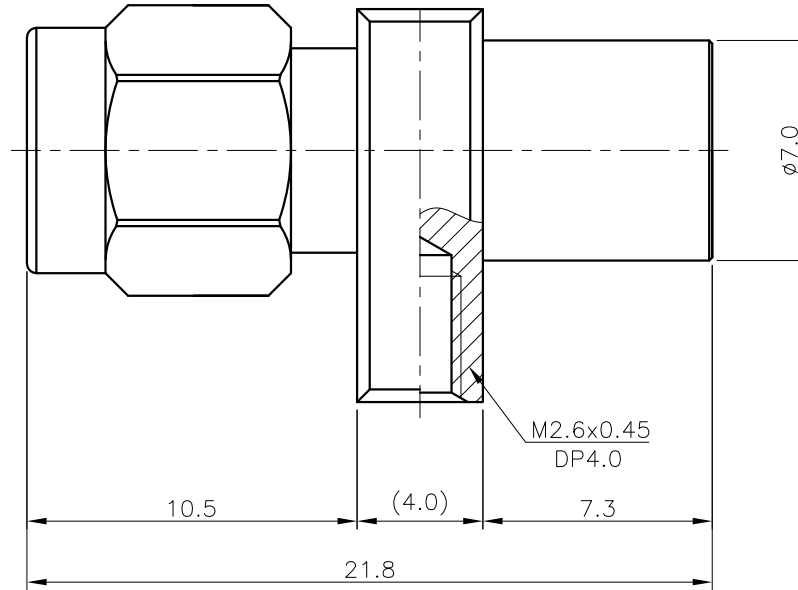

■ 제품 사진과 동일한 위치에 네임펜 마킹 처리 진행 (파란색)
마킹 처리 X (23.03.28)

ELECTRICAL DATA

1	Frequency range	DC ~ 6.0 GHz
2	IMPEDANCE	50 Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.5dB min

TOLERANCE	Decimal ± 0.2	DATE 2023. 02. 20.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle $\pm 1^\circ$	APPROVED BY			
MATERIAL		CHECKED BY		TITLE SMA50 (P) SMBL50 (J) ST ADAPTOR	
FINISH		DRAWN BY	S.H.KIM		
		SCALE 4/1	UNIT mm	A4	DWG NO. AD00678-7/4
					REVISION I R SHEET 1 of 1