



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.06.08.

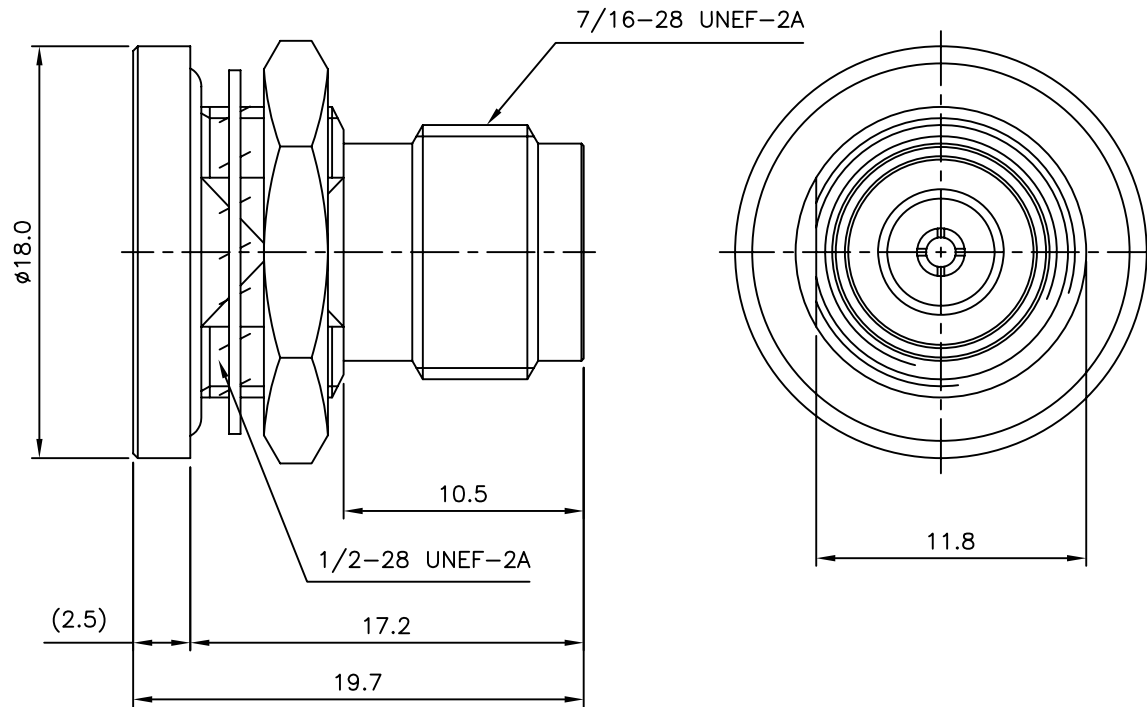

ELECTRICAL SPECIFICATIONS	
Frequency	DC~5GHz
V.S.W.R	1.25 : 1 (Max)
Insertion Loss	-1.0dB (Min)
Impedance	50Ω (Nominal)

7	WASHER	1	MBsBD C3604BD-F	Nickel Plate	DWA00022-5/1
6	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00020-5/1
5	GASKET	1	SILICONE		DGK00036-N/1
4	INSULATOR	1	TEFLON		DAI02462-N/1
3	INSULATOR	1	TEFLON		DAI00136-N/1
2	CONTACT	1	BeCu KS D 5102 C1720	Gold Plate (1.27μm)	DAC03237-5/1
1	BODY (A)	1	MBsBD C3604BD-F	Nickel Plate	DAD00408-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2020. 06. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE MCX50 (J) TNC50 (J) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. AD00697-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	



A4