


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.07.01.

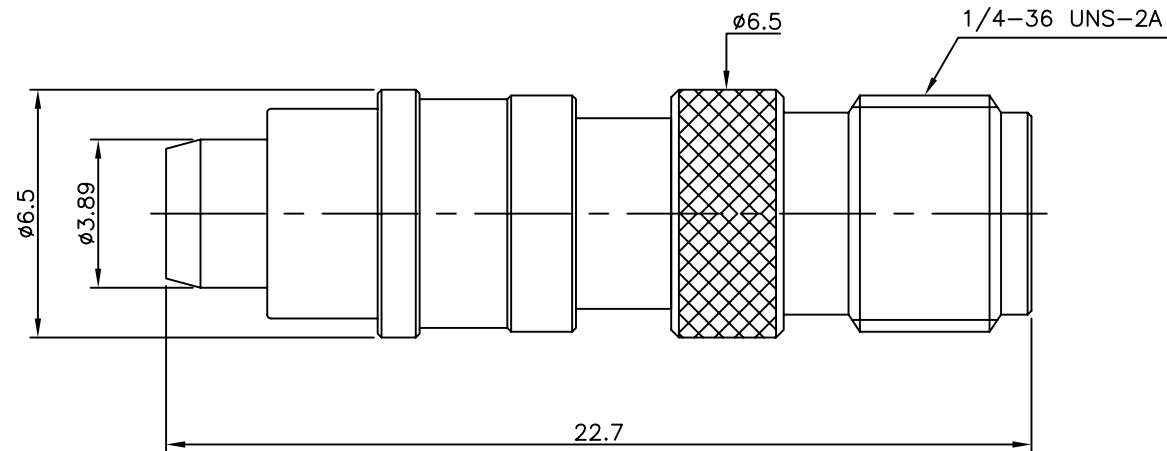

* ELECTRICAL SPECIFICATIONS

1. Frequency Range : DC~6GHz
2. Impedance : 50Ω
3. V.S.W.R (MAX) : 1.2
4. Insertion Loss (MIN) : -0.2dB

7	SPRING	1	SUS	Passivate	DSR01133-5/1
6	CAP	1	MBsBD C3604BD-F	Gold Plate	DCU02323-5/1
5	INSULATOR	1	TEFLON		DIN03231-N/1
4	INSULATOR	1	TEFLON		DIN02133-N/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DAC03372-5/1
2	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04759-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04756-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 07. 01.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 (J) SMBQ50 (P) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. AD00718-7/1 REVISION I R SHEET 1 of 1
		5/1	mm	

A4