
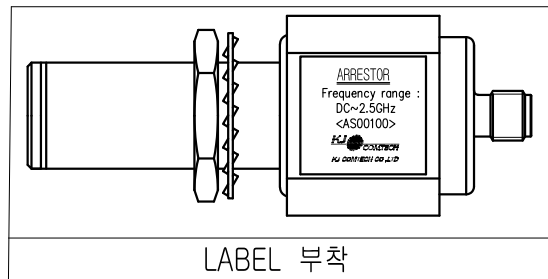
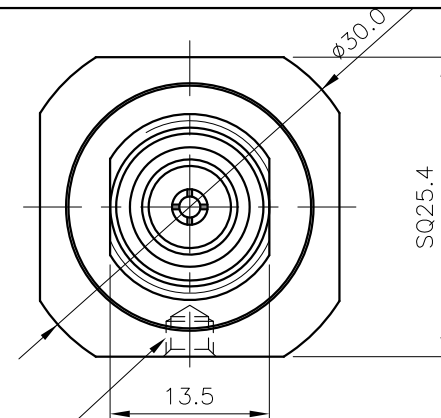


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	Y.H.CHOI	2010.10.19.
1	[설번 NO.201704-0006] 역지개용시 부적합으로 인한 공차 수정 (+0.05 / 0 → 0 / -0.05)	S.Y.EUN	I.C.KIM	2017.04.20.
2	기존 GAS TUBE DGT00001-N/1 단종으로 인한 구조 변경	S.Y.EUN	I.C.KIM	2020.10.07.
3	기존 GAS TUBE DGT00002-N/1 단종으로 인해 DGT00021-N/1 적용 구조 변경	S.H.KIM		2023.02.09.

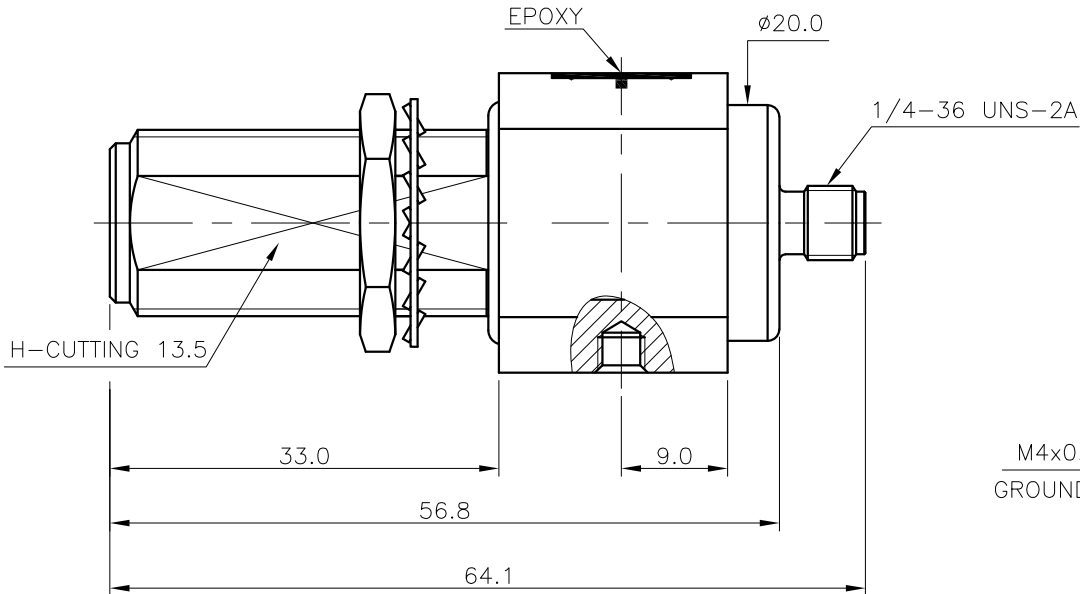

* ELECTRICAL SPECIFICATIONS

Impedance : 50 Ω (Nominal)
Frequency Range : DC~2.5GHz
V.S.W.R (Max) : DC~2.5GHz @ 1.2 : 1
~3.0GHz @ 1.3 : 1
Insertion Loss (Max) : DC~2.5GHz @ 0.2dB
~3.0GHz @ 0.4dB
Type : Gas Capsule Type
DC Break down Voltage : 2500V $\pm$ 20%
Surge current : 2.5kA (8/20 μ s)

16	EPOXY (경화제519)	1	—	—	CAD00021-N/2 (경화제519)	3	CONTACT	1	BeCu C17300	Gold Plate	DCT03664-5/1	
15	EPOXY (주제519)	1	—	—	CAD00021-N/1(주제519)	2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD02439-5/2	
14	LABEL	1	은무데드롱		DLA00354-8/1	1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD02839-5/3	3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	± 0.3	2023. 02. 09.							
	Angle	APPROVED BY							
MATERIAL	$\pm 1^\circ$	CHECKED BY				TITLE	N50 (J) SMA50 (J) BH ARRESTER(Gas Type)		
	_____	DRAWN BY	S.H.KIM						
FINISH	_____	SCALE	UNIT		A4	DWG NO.	AS00100-7/2		
		1.5/1	mm			REVISION	3	SHEET	1 of 1

KJ COMTECH
RF & MICROWAVE TECHNOLOGY
KJ COMTECH CO.,LTD.
Tel : 82-32-347-8015
Fax : 82-32-347-8017