


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	I.C.KIM	2013.07.22.
1	특성 Data 관리 구성 양식 변경	I.C.KIM		2016.12.08.

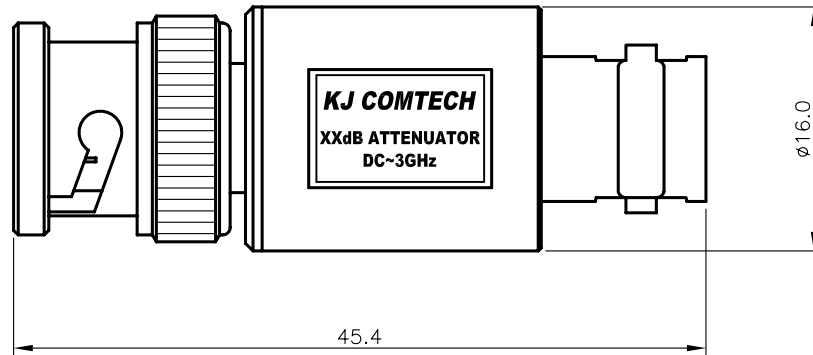

ELECTRICAL SPECIFICATIONS				
Frequency Range : DC~3GHz				
KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (Max)	Impedance (Nominal)	Power
AT00086	1~5 $\pm$ 0.5	1.2	50ohm	2 Watt
	6~30 $\pm$ 1.0			

MECHANICAL SPECIFICATIONS		
Part	Material	Finish
Body	Brass	Nickel Plate
Female Contact	Beryllium copper	Gold Plate
Male Contact	Brass	Gold Plate
Cap	Brass	Nickel Plate
Insulator	PTFE	—

		NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	CODE	
TOLERANCE	Decimal	DATE		2016. 12. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle	APPROVED BY							
MATERIAL	—	CHECKED BY				TITLE BNC50(J) – BNC50(P) ATTENUATOR			
		DRAWN BY		I.C.KIM					
FINISH	—	SCALE	UNIT		A4	DWG NO.		AT00086	
		3/1	mm			REVISION	1	SHEET	1 of 1