
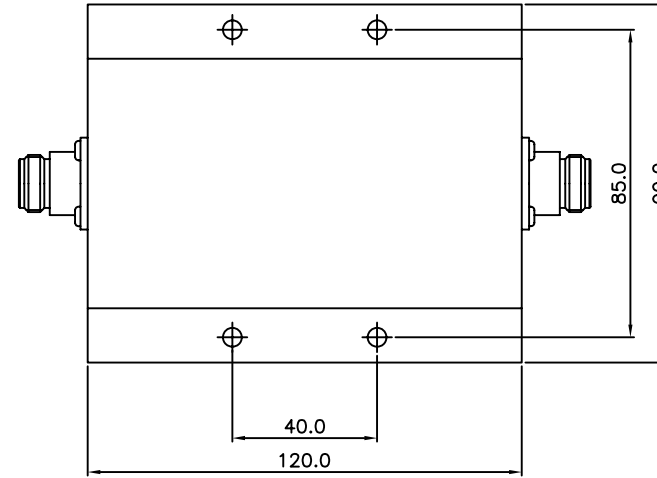



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2021.05.12.
2				



ELECTRICAL SPECIFICATIONS				
Frequency Range : DC~6GHz				
KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (Max)	Impedance (Nominal)	Power
AT00155-N/1	20dB $\pm$ 1.0dB	1.3	50ohm	30 Watt
AT00155-N/2	30dB $\pm$ 1.5dB			

MECHANICAL SPECIFICATIONS	
Connector Body	Brass / SUCO Plate
Connector Contact	Brass / Gold Plate
Housing	Aluminium Black Anodized

TOLERANCE Decimal .X = $\pm$ 0.1 XX = $\pm$ 0.05	DATE 2021. 05. 12.	 KJ CORTECH CO., LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
MATERIAL AL6061	APPROVED BY I.C.KIM	
PLATING	CHECKED BY	TITLE DC~6GHz 30Watt N50 (J) N50 (J) ATTENUATOR
PAINING	DRAWN BY S.Y.EUN	DWG NO. AT00155
SCALE 2/1	UNIT mm	REVISION IR
 A2		SHEET 1 of 1