

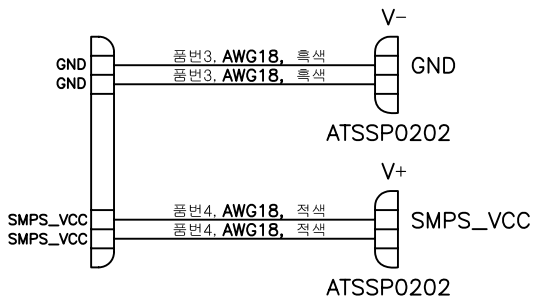


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.M.LEE	I.C.KIM	2015. 11. 17.

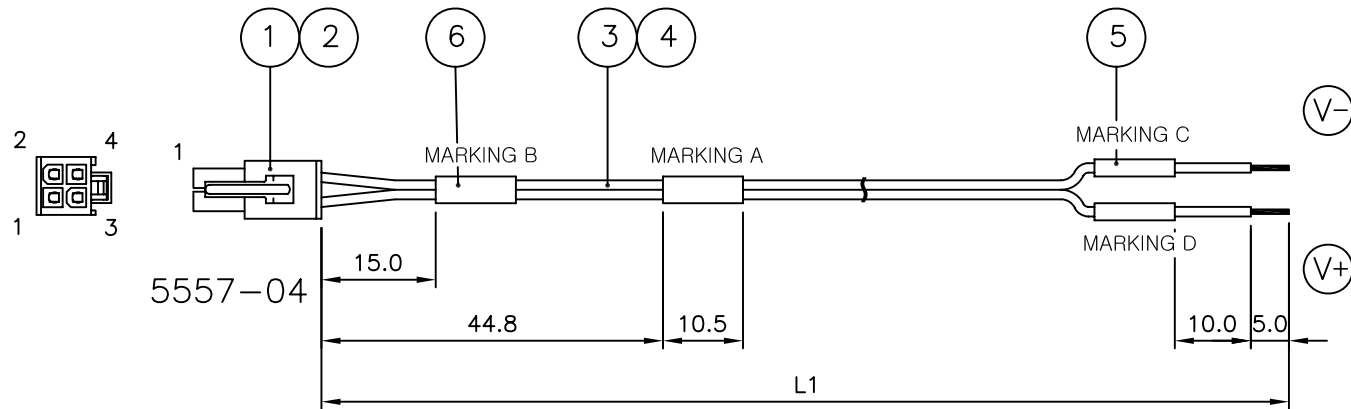

배선 공차표

길 이		공 차
이 상	까 지	
0	300.0	+25.0 0
301.0	2000.0	+50.0 0
2001.0	-	+75.0 0

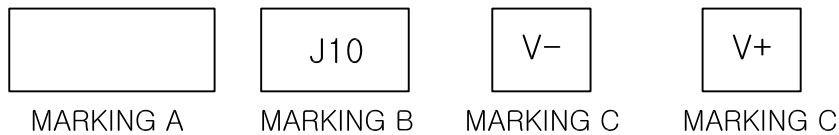

Notes

1. 명납 : KS D 6704, S60E, S60A 또는 S63E, S63A에 준할 것
2. 작업방법은 IPC/WHMA-A-620에 의거 작업할 것.
3. MARKING A-D는 라벨이며 확대도를 참조하여 식별가능한 위치에 부착할 것.
4. 배선장치 시험조건
 - 가. 도통시험 : 연결기 핀간 DC저항 측정치 3Ω 이하
 - 나. 정전저항 : 500 ± 50 VDC로 2초간 인가시 100MΩ 이상
5. 치수는 참고치이며 허용범위는 배선 공차표 참조할 것.
6. 사용품 품번 2~4는 품질성능을 만족하는 동등 이상품 사용가능

6	MARKING TUBE	2	LS TUBE	ATU00224-N/1	Ø10-10.5mm (White)
5	MARKING TUBE	2	LS TUBE	ATU00210-N/1	Ø3-10.5mm (White)
4	CABLE	2	UL1333	ACA00278-N/1	18AWG (RED)
3	CABLE	2	UL1333	ACA00277-N/1	18AWG (BLACK)
2	TERMINAL PIN	4	MOLEX	DCN00115-N/1	5556T
1	HOUSING	1	MOLEX	DCN00092-N/1	5557-04
NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS
DATE			2015. 11. 17.		
APPROVED BY		I.C.KIM		KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
CHECKED BY					
DRAWN BY		S.M.LEE			
CHECKED BY					
SCALE			TITLE		
N/S		UNIT	배선장치, 주전원반전원용		
		mm	A4	DWG NO.	CD00004-7/1
				DETAIL NO.	
				REVISION	I R