


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	G.Y.KIM	I.C.KIM	2017. 02. 16.

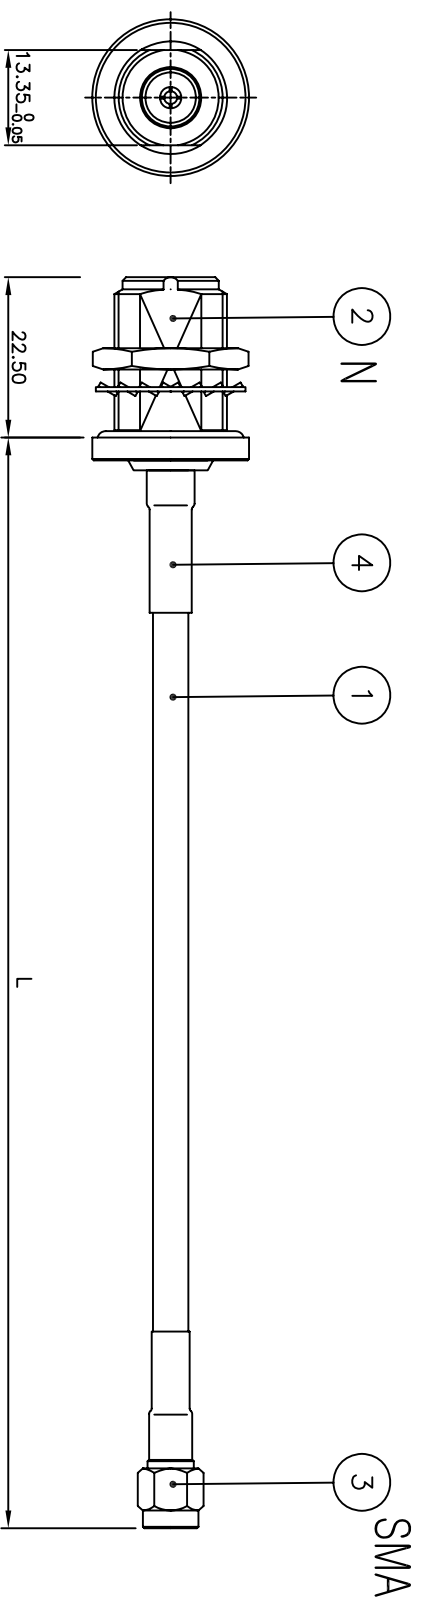


Notes

1. RoHS & Pb--FREE
2. CONNECTOR FINISHES
2-1. N JB-----▶▷ BODY : Nickel Plating
CONTACT : Gold Plating
NUT : Nickel Plating

- 2-2. SMA PS---▶▷ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

*전기적 특성
IMPEDANCE : 50Ω
FREQUENCY RANGE : DC~3G
V.S.W.R : 1.25 MAX

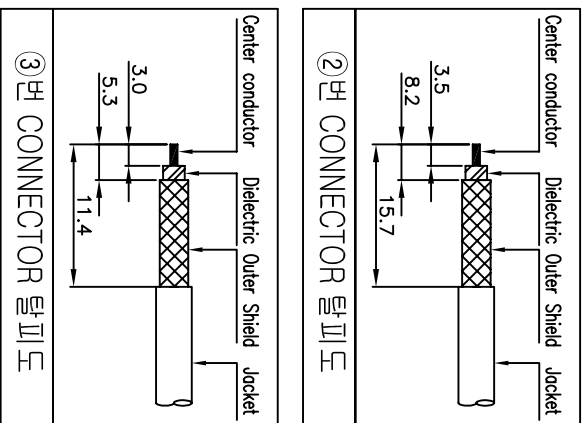

CUSTOMER	4	BONDING TUBE	2	LS TUBE	ATU000006-N/1	ø6-20 (BLACK)
	3	CONNECTOR	1	KJ COMTECH	CN00918-7/1	SMA50 PS
	2	CONNECTOR	1	KJ COMTECH	CN02912-7/1	N50 JB
	1	COAXIAL CABLE		EXPANTEL	ACA000099-N/1	RG223 (50Ω) (GRAVY)
CUSTOMER CODE	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE 2017. 02. 16.					
CUSTOMER CODE	APPROVED BY	I.C.KIM				
	CHECKED BY					
	DRAWN BY	G.Y.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				
	A4					
		DWG NO.	CF00271-7/1			
		DETAIL NO.				
		REVISION	I R	SHEET	1 of 1	
TITLE CABLE ASS'Y						
KJ COMTECH CO.,LTD.						
RF & MICROWAVE TEL: 82-32-347-8015 FAX: 82-32-347-8017						