


CF01407-7/1

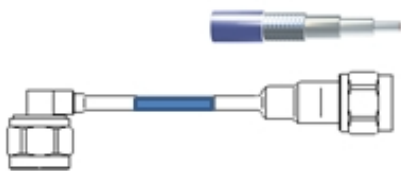

N-PL+N-PS+141MF(BLUE)
N PL Solder+FERRULE
BO/Ni PI/Go CAP/NI
N(~10GHz) PS Solder+SCREW
BO/Ni PI/Go CAP/NI

CF01407-7/1 1.2M

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

1.2M - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	- 1.04, 1.04, 0.46
■_2.0GHz	- 1.07, 1.07, 0.68
■_3.0GHz	- 1.09, 1.10, 0.86
■_4.0GHz	- 1.13, 1.15, 1.02

■_5.0GHz	- 1.17, 1.23, 1.17
■_6.0GHz	- 1.13, 1.20, 1.32
■_7.0GHz	- 1.13, 1.13, 1.43
■_8.0GHz	- 1.18, 1.19, 1.61

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

■ N (J) N (J) AD00379-7/2

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

