
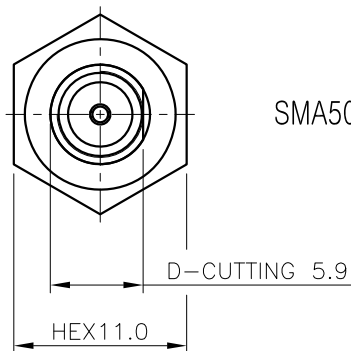



* O-RING GASKET

- KJ CODE : DGK00023-N/2
- SILICONE - RED



(SCALE 2:1)

SMA50 JB (F/N)

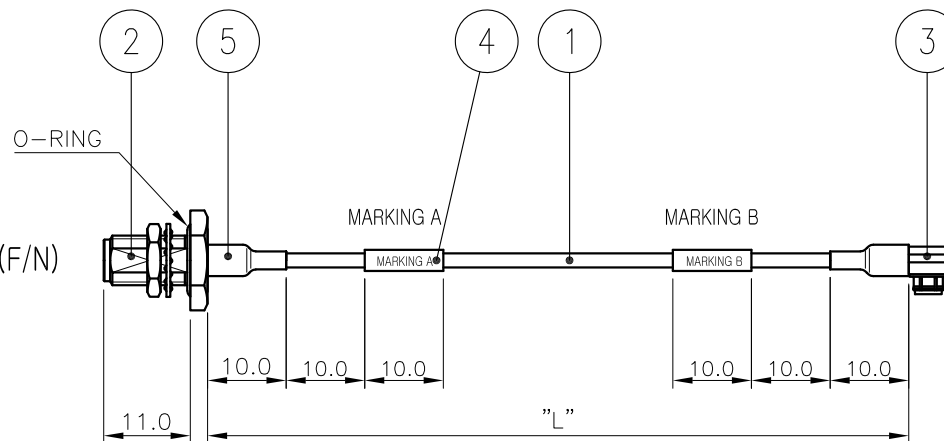

순수케이블 절단길이 : "L"+10mm

*영업에서 수주등록시 고객사 P/N 에 맞게 마킹 내용 적용

도번	MARKING A	MARKING B
-00	RF1	RF1
-01	RF2	RF2

Notes


1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. SMA JB -----> BODY : Gold Plate
CONTACT : Gold Plate
NUT/WASHER : Gold Plate
- 2-2. MMBX PL-----> BODY : Gold Plate
CONTACT : Gold Plate

* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~2GHz
- Marker 1 : 1227.60MHz
 - Marker 2 : 1575.42MHz
 - Marker 3 : 1602.00MHz
3. VSWR : 1.5(Max)

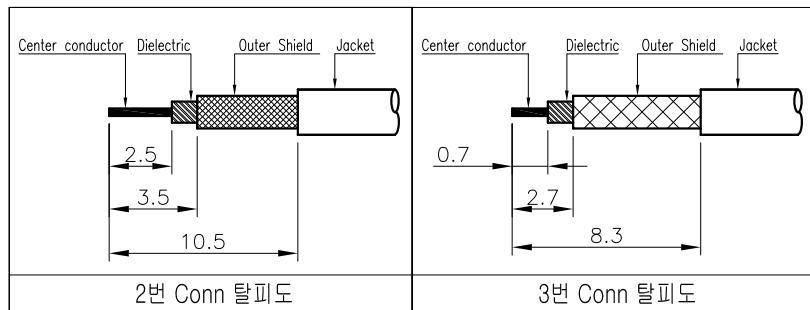

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2020. 08. 19.				
CUSTOMER CODE	APPROVED BY	S.H.KIM				
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
	CHECKED BY					
SCALE		UNIT		TITLE		
N/S		mm		CABLE ASSEMBLY		
				A4		
				DWG NO. CF01511-7/2		
				REVISION I R SHEET 1 of 1		

5	SHRINK TUBE (방산)	2	LS 전선	ATU00357-N/1	GSHS-1635F-03-BK Ø3-10mm Black
4	MARKING TUBE (방산)	2	LS 전선	ATU00414-N/1	GSHS-1635F-03-WH Ø3-10mm White
3	CONNECTOR	1	KJ COMTECH	CN04068-7/1	MMBX50 PL
2	CONNECTOR	1	KJ COMTECH	CN00104-7/3	SMA50 JB (F/N)
1	COAXIAL CABLE		EXPANTEL	ACA00046-N/1	RG178(50Ω) EXRG-178T-50-CW



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017