



* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 1100MHz ~ 1700MHz
 - Marker 1 : 1227.6MHz
 - Marker 2 : 1575.42MHz
 - Marker 3 : 1602MHz
3. VSWR : 1.3(Max)

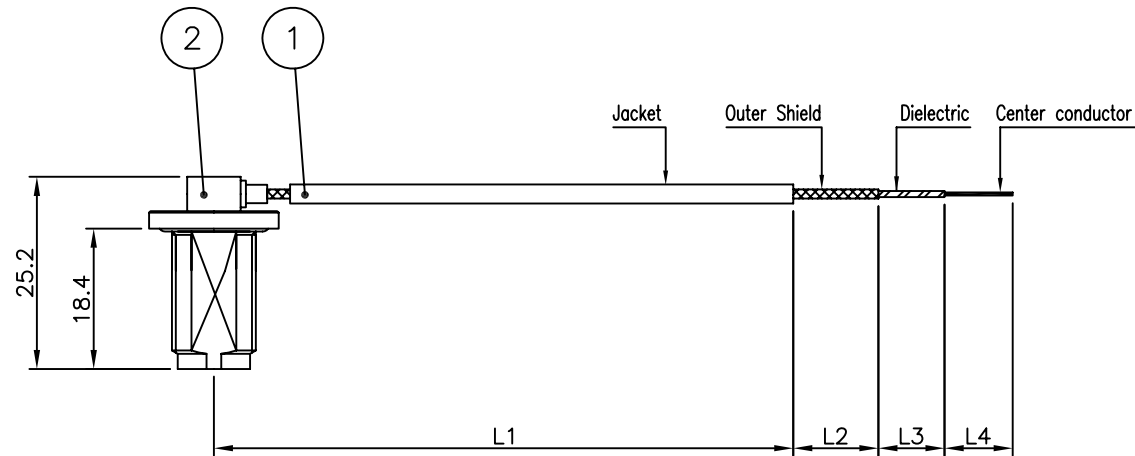

* NUT, WASHER 개별포장



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. TNC50 JL-BH-----▷ BODY : Nickel Plating
 - CONTACT : Gold Plating
 - NUT/WASHER : Nickel Plating

	2	CONNECTOR	1	KJ COMTECH	CN04045-7/1	TNC50 JL-BH	
	1	COAXIAL CABLE		EXPANTEL	ACA00114-N/1	47FJ (50Ω)-CLEAR	
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
CUSTOMER CODE	DATE 2022. 04. 05.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	APPROVED BY	S.H.KIM					
	CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°	CHECKED BY			TITLE CABLE ASS'Y		
DRAWN BY		S.Y.EUN					
CHECKED BY				A4	DWG NO.	CF01626-7/1	
SCALE N/S		UNIT mm			DETAIL NO.		
				REVISION	I R	SHEET 1 of 1	