
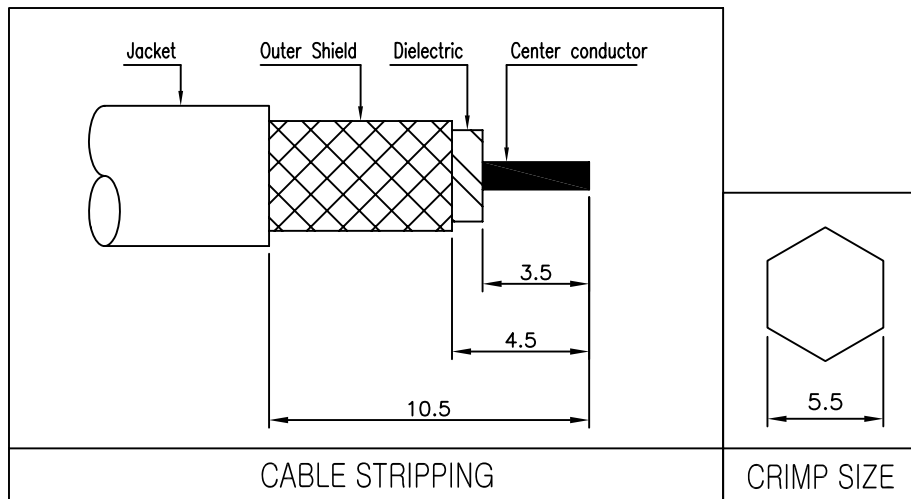
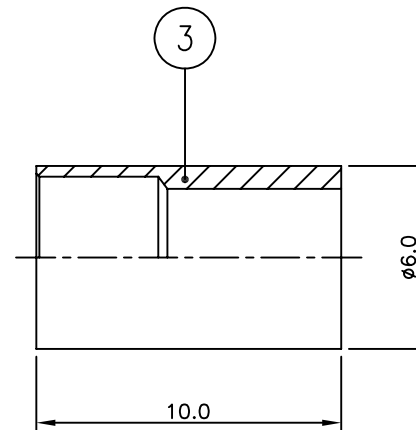


* 측정 ADAPTOR : AD00644-7/2
- 2.92mm (J) 2.92mm (J)

■ 작업 전 샘플로 PIPE 전체 압착하여 특성 확인 후, 해당 Lot 모두 PIPE 전체 압착하여 작업할 것

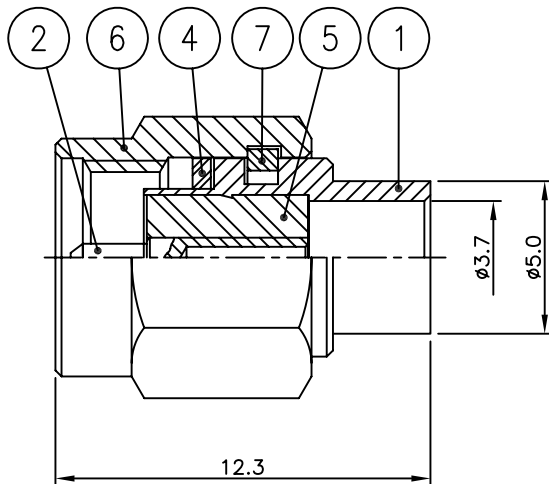

7	SPRING RING	1	SUS	부동태 처리	DSR00002-5/1
6	COUPLING CAP	1	MBsBD C3604BD-F	SUCO Plate	DCU00005-5/4
5	INSULATOR	1	TEFLON		DIN00173-N/1
4	GASKET	1	SILICONE RUB		DGK00004-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00162-5/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate	DCT00286-5/3
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DBD03205-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2015. 12. 02.	
	Angle	APPROVED BY	I. C. KIM
MATERIAL	-	CHECKED BY	
		DRAWN BY	S. M. LEE
FINISH	-	SCALE	4/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO.,LTD.		TITLE SMA50 CABLE PS MF141(50Ω)	
DWG NO. CN02764-7/3		REVISION I R SHEET 1 of 1	