
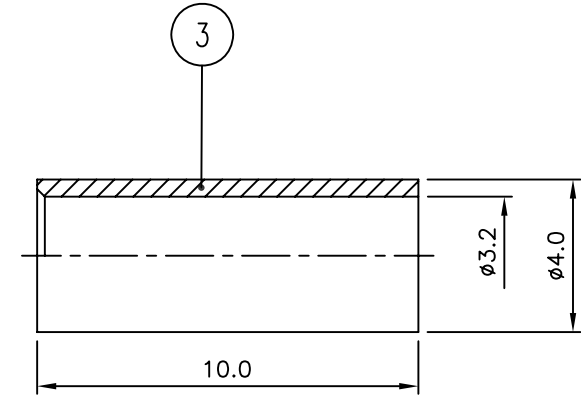


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	C.K.KIM	I.C.KIM	2016. 06. 22.
1	[설번No.202203-0008] PIPE 공용화 부품 적용으로 인한 코드 변경	S.Y.EUN	S.H.KIM	2022. 03. 15.

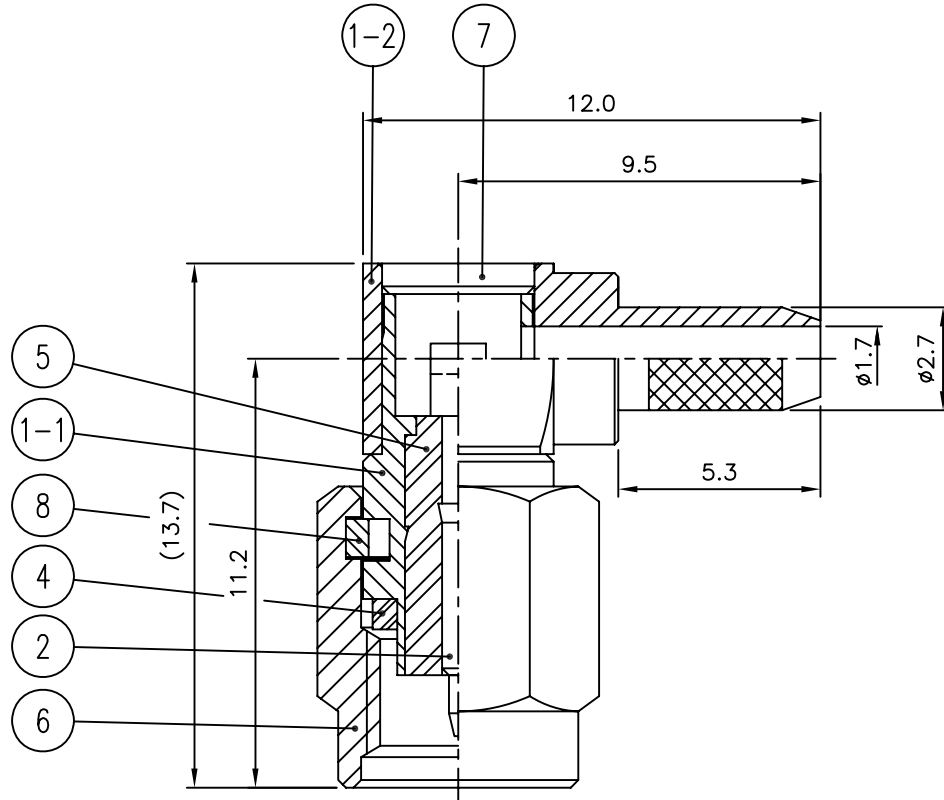

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm

2. FREQUENCY RANGE : DC~6GHz

3. VSWR (Max) : 1.2 @ DC~3GHz
1.3 @ 3~6GHz

4. INSULATION RESISTANCE : $\geq 10000M\Omega$

5. CENTER CONTACT RESISTANCE : $\leq 4m\Omega$

6. OUTER CONTACT RESISTANCE : $\leq 2.5m\Omega$

7. DIELECTRIC WITHSTANDING : 750 V RMS

ELECTRICAL DATA :

1. CONNECTOR DURABILITY : 500 Mating cycles min

8	SPRING RING	1	BeCu C17300	Gold Plate	DSR00003-5/1
7	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00015-5/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00137-5/2
5	INSULATOR	1	TEFLON		DIN01335-N/1
4	GASKET	1	SILICONE RUB		DGK00003-N/2
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate Gold Plate	DFE00034-5/1 DFE00031-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00295-5/1
1-2	BODY	1	MBsBD C3604BD-F	Gold Plate	DBB00445-5/1 DBD04186-3/1
1-1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD02088-3/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2022. 03. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.H.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SSMA50 CABLE PL RG316(50Ω)
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03623-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	