
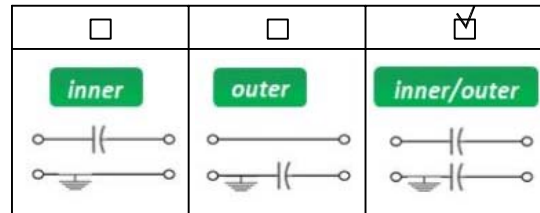
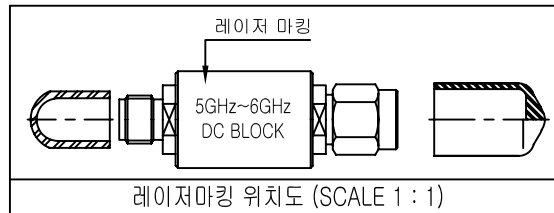


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM		2019.08.11.
1	레이저 마킹 내용 변경	S.Y.EUN	S.H.KIM	2022.02.18.

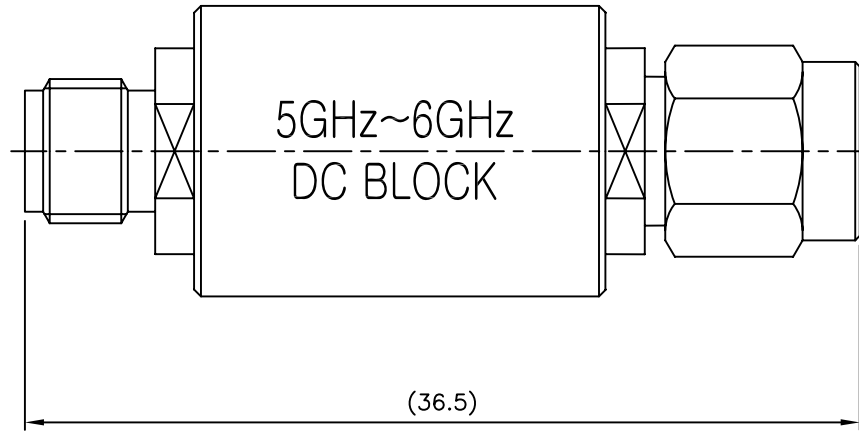

* ELECTRICAL SPECIFICATIONS

1. Frequency Range : 5GHz ~ 6GHz
2. Impedance : 50Ω
3. V.S.W.R (Max.) : 1.35 : 1
4. Insertion Loss (Max.) : 1.0dB
5. Voltage Rating : 2kV
6. 1W, IP67

19	DUST CAP	1	PVC (White)		DGK00313-N/1
18	DUST CAP	1	PVC (Red)		DGK00069-N/1
17	CAPACITANCE	1	—		DCP00112-N/3
16	SPRING	1	SUS	Passivated	DSR01120-5/2
15	SPRING RING	1	SUS	Passivated	DSR00002-5/1
14	CAP	1	SUS	Passivated	DCU00006-5/1
13	COVER	1	PEEK		DCS00060-1/1
12	INSERT	2	MBsBD C3604BD-F	Gold Plate	DIS00304-5/1
11	PCB	1	0.5T 1/20Z		DPC01091-9/1
10	INSULATOR	1	TEFLON		DIN03075-N/1
9	INSULATOR	1	TEFLON		DIN03074-N/1
8	INSULATOR	1	TEFLON		DIN03076-N/1
7	GASKET	2	SILICONE RUB		DGK00269-N/2
6	GASKET	1	SILICONE RUB		DGK00004-N/1
5	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04048-5/1
4	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04047-5/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT04046-5/1
2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04530-5/1
1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD04529-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2022. 02. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	S.H.KIM	
MATERIAL	—	CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50-A-JP Inner / Outer DC Block (200V)
	—	DRAWN BY	S.Y.EUN	
FINISH	—	SCALE	3/1	A4 DWG NO. DB00013-7/3 REVISION 1 SHEET 1 of 1
	—	UNIT	mm	