


REVISION		
REV	DESCRIPTION	DATE
1	CHANGED DIMENSION 30.6 -> 30.55	2004.04.23.
2	CHANGED DIMENSION 2.0 -> 3.4	2004.09.08.

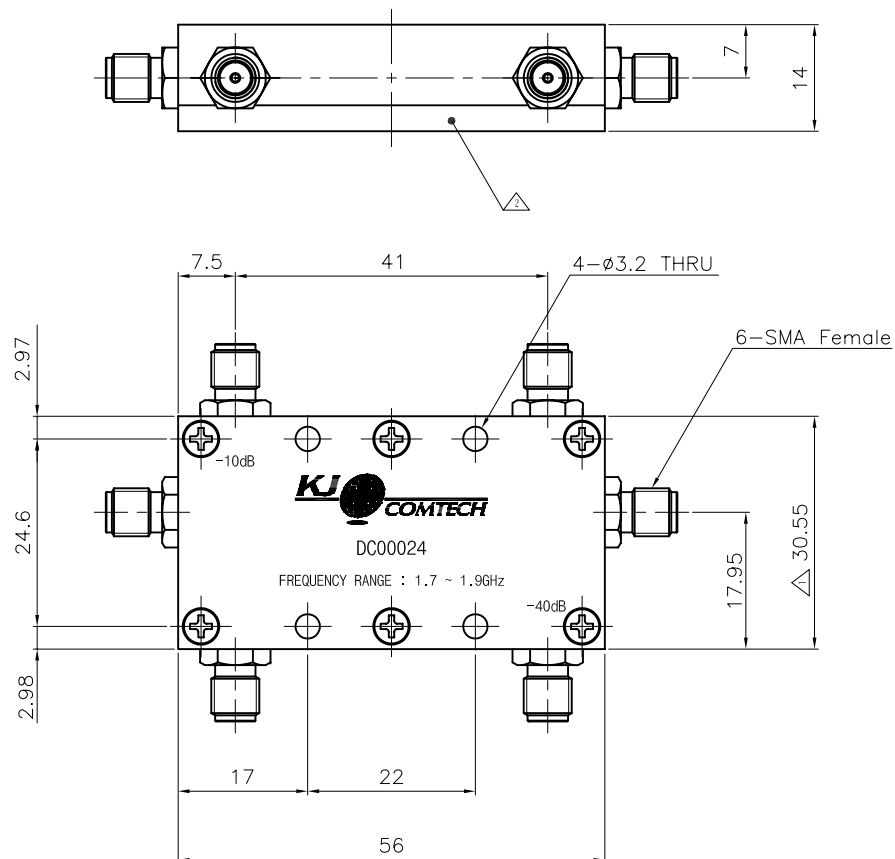

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1700.0 ~ 1900.0MHz
 Coupling Value : 10dB±0.5dB / 40dB±0.5dB
 Coupling Flatness : ±0.3dB
 Insertion Loss (Max.) : 1.0dB
 V.S.W.R (Max.) : 1.2 : 1
 Directivity (Min.) : 20.0dB
 Power Handling (Max.) : 1.0W
 Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (Yellow Chromate)
 CONNECTORS : MBsBD (Nickel Plate)
 CONNECTORS PINS : Beryllium Copper (Gold Plate)
 INSULATORS : TEFLON

REVISION		REV.B	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE		2004. 9. 8.		 RF & MICROWAVE TECHNOLOGY Td : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY							
	Angle	CHECKED BY							
MATERIAL		DRAWN BY				TITLE			
A6061 T6						10/40dB Directional Coupler			
FINISH		SCALE	UNIT		A4	DWG NO.		DC00024-7/1	
Yellow Chromate		1/1	mm			SHEET		1	OF