


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2003.04.03.

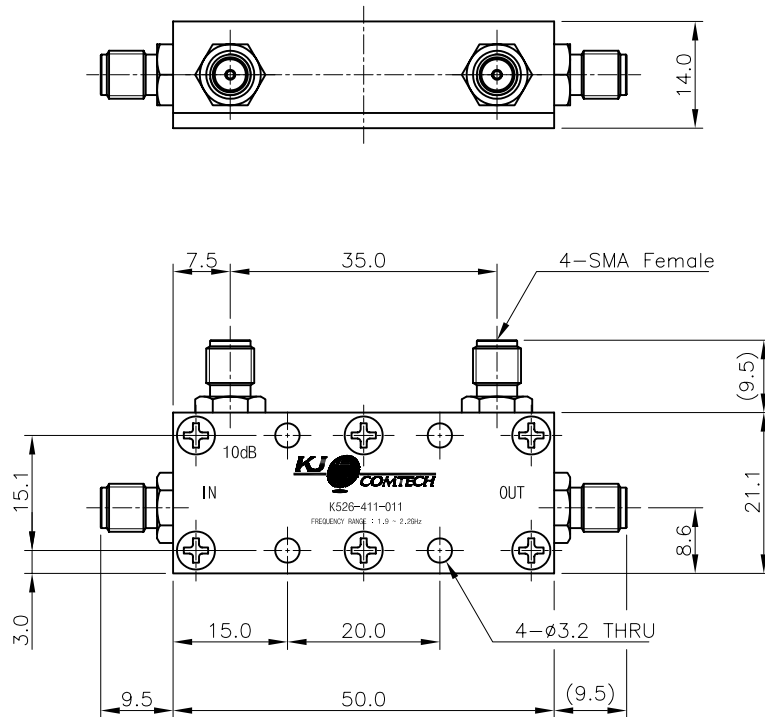

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1900.0 ~ 2200.0MHz

Coupling Value : 10.0 ± 0.5 dB

Insertion Loss (Max.) : 0.6dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Impedance : 50.0 Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2003. 04. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 10dB Directional Coupler
		DRAWN BY	K.I.CHO	
FINISH	Yellow Chromate	SCALE	1/1	A4 DWG NO. DC00032-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	