

1



2

3

4

REVISION

REV	DESCRIPTION	DATE
△		
△		

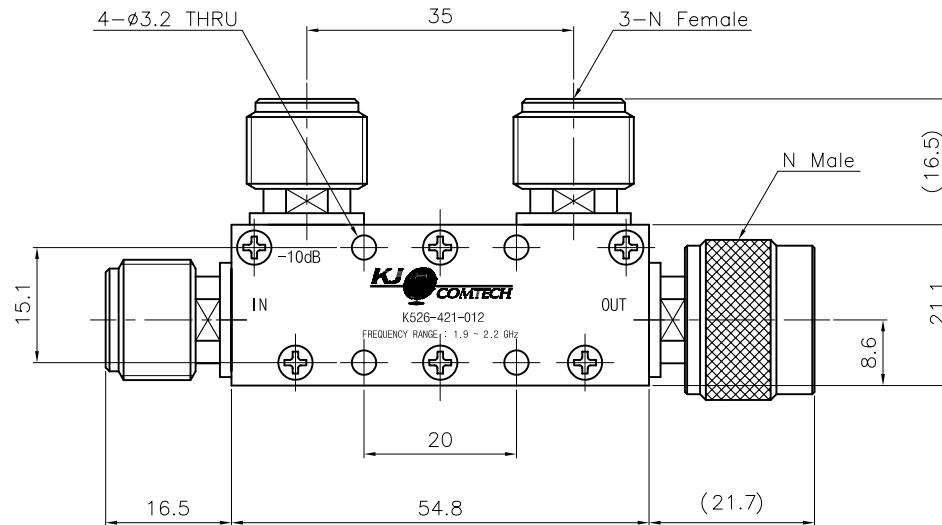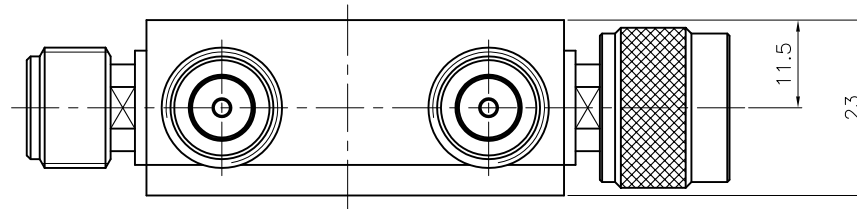

* ELECTRICAL SPECIFICATIONS

Frequency Range : 1900.0 ~ 2200.0MHz

Coupling Value : 10dB±0.5dB

Insertion Loss (Max.) : 0.7dB

V.S.W.R (Max.) : 1.2 : 1

Directivity (Min.) : 20.0dB

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION	REV.B	NO.	DESCRIPTION		Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE 2003. 2. 4.			 RF & MICROWAVE TECHNOLOGY Tel : 82-22-347-8015 Fax : 82-22-347-8017			
	± 0.3	APPROVED BY						
	Angle	CHECKED BY						
MATERIAL		DRAWN BY		TITLE				
		A6061 T6		10dB Directional Coupler				
FINISH Yellow Chromate		SCALE	UNIT		DWG NO. DC00074-7/1			
		1/1	mm		SHEET 1 OF 1			