
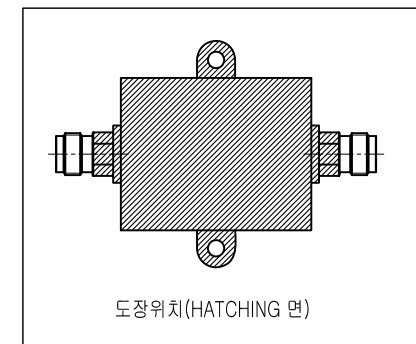
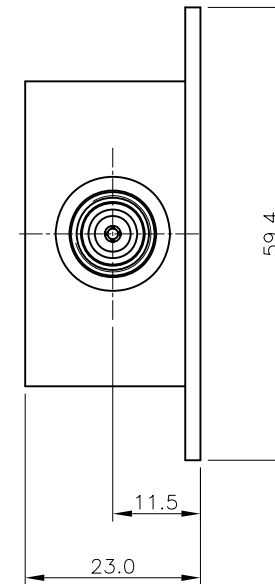


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△	Initial Registration	S.L.SON	J.H.YOUN	2016.12.19.
△				

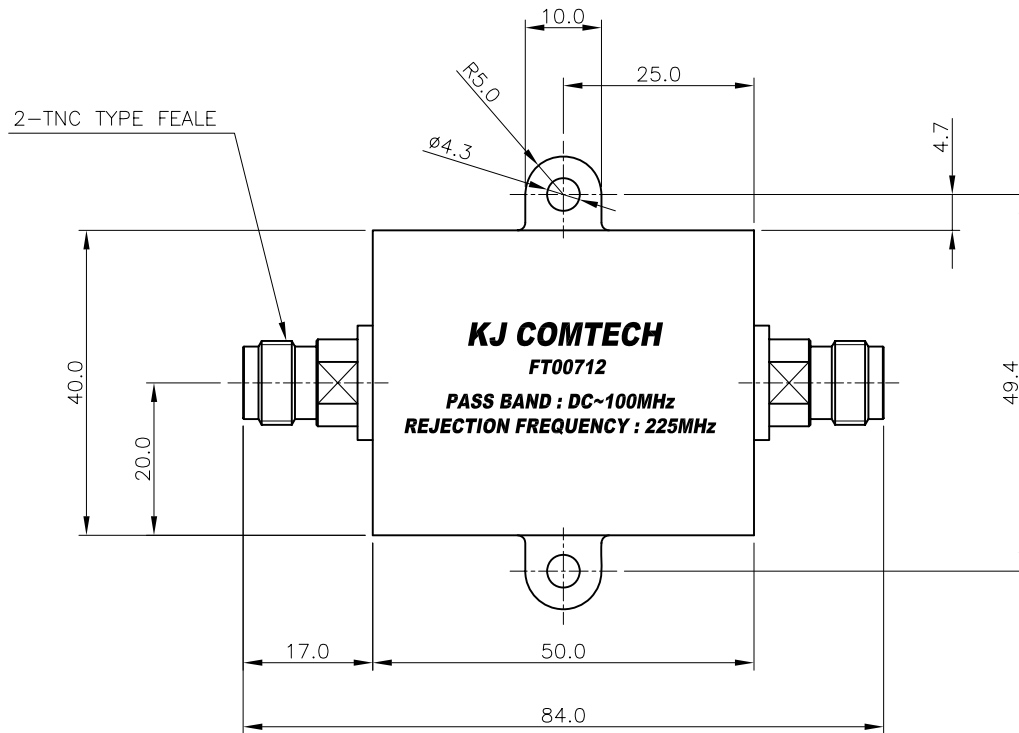

* ELECTRICAL SPECIFICATIONS
 PASS BAND FREQUENCY : DC~100MHz
 PASS BAND INSERTION LOSS : 0.5dB
 REJECTION VALUE (Min.) : -35dB (@225MHz)
 V.S.W.R (Max.) : 1.5 : 1
 INPUT POWER (Max.) : 50W
 OPERATION TEMPERATURE : -30~70°

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 T6 (White Chromate)
 CONNECTORS : MBsBD (Ni Plate)
 CONNECTORS PINS : Female / Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON
 PAINTING : DIC-582(BLACK)
 TEXT : WHITE

* ENVIRONMENTAL SPECIFICATIONS
 IP65
 MIL-STD-810

TOLERANCE	Decimal	DATE 2016. 12. 19.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	T.J.KIM	TITLE LOW PASS FILTER
		DRAWN BY	S.L.SON	
FINISH	DIC-582(BLACK)	SCALE	1/1	DWG NO. FT00712-8/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4