


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	K.S.KIM	S.L.SON	2020.12.04.

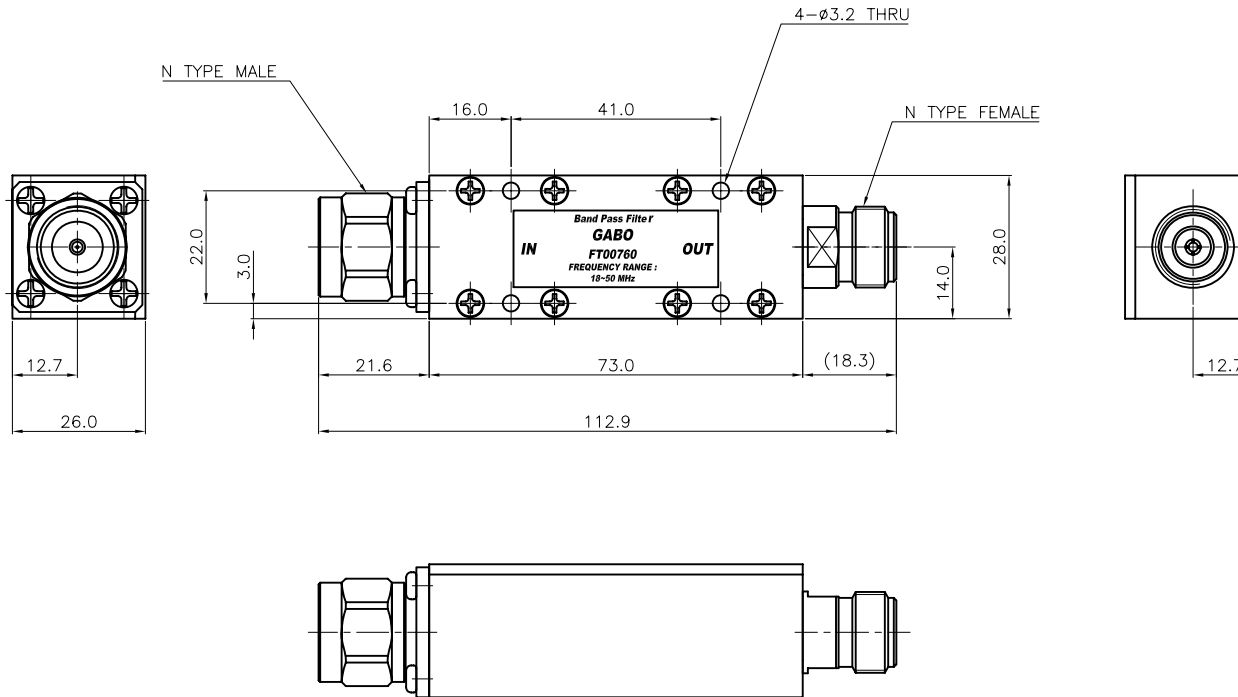

* ELECTRICAL SPECIFICATIONS

Parameter	Unit	Specification			Comments
Frequency	MHz	DC~15	18~50	70~2000	
In/Out VSWR	dB	-	1.5:1	-	Max.
Insertion Loss	dB	-	1.5	-	Max.
Flatness	dB	-	1	-	Max.
Rejection	dB	18	-	28	Min.
Handling Power	W	1			Max.
Impedance	Ω	50			

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 (White Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : MBsBD (Gold Plate)

INSULATORS : TEFLON

* ENVIRONMENTAL SPECIFICATION

-20°C ~ 70°C

TOLERANCE	Decimal	DATE	2020. 12. 04.		 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY	S.L.SON					
MATERIAL	±1°	CHECKED BY	S.L.SON		TITLE	Band Pass Filter		
	A6061 T6	DRAWN BY	K.S.KIM					
FINISH	White Chromate	SCALE	1/1	UNIT	A3	DWG NO.	FT00760-7/1	
				mm		REVISION	1	SHEET