
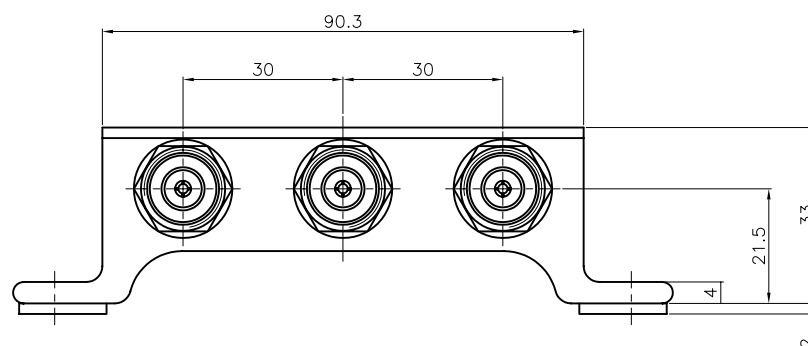
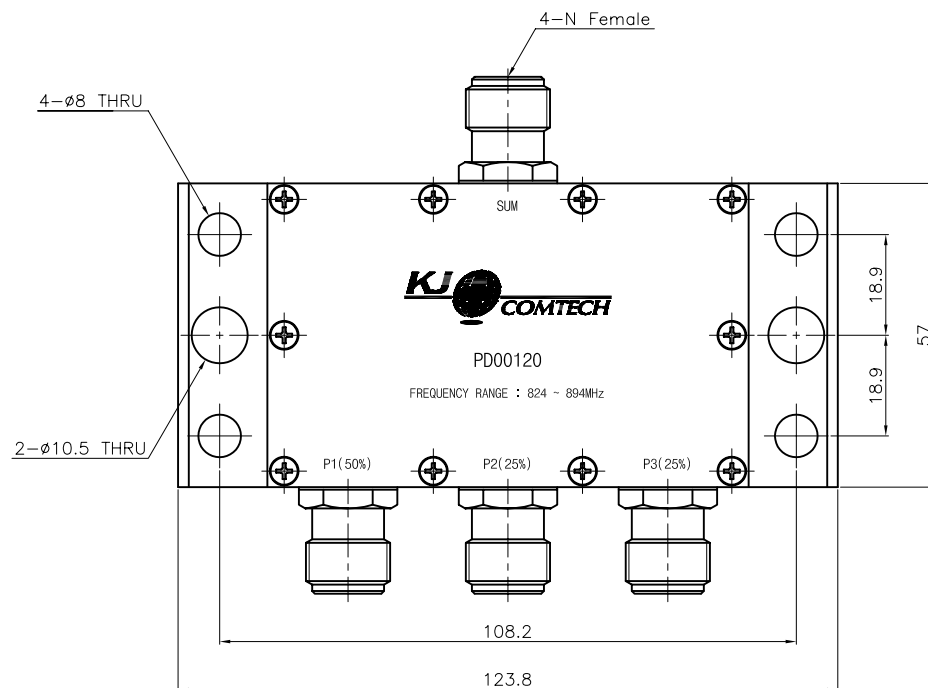


REVISION		
REV	DESCRIPTION	DATE
△		
△		

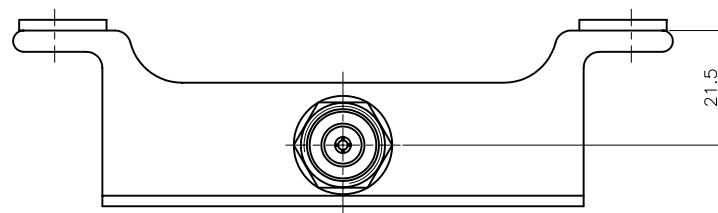

* ELECTRICAL SPECIFICATIONS

Frequency Range : 824.0 ~ 894.0MHz
Insertion Loss (Max.) : 3.5dB (50%)/7.0dB (25%)/
7.0dB (25%)

V.S.W.R (Max.) : 1.3 : 1
Isolation (Min.) : 25.0dB
Power Handling (Max.) : 5.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)
CONNECTORS : MBsBD (SUCO Plate)
CONNECTORS PINS : Beryllium Copper (Silver Plate)
INSULATORS : TEFLON

REVISION	I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	± 0.5	DATE 2005. 1. 31.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle	± 1°	APPROVED BY					
			CHECKED BY					
MATERIAL		A6061 T6	DRAWN BY		TITLE			
					3WAY POWER DIVIDER			
FINISH		Yellow Chromate	SCALE	UNIT	A3	DWG NO. PD00120-7/1		
			1/1	mm		SHEET 1 OF 1		