
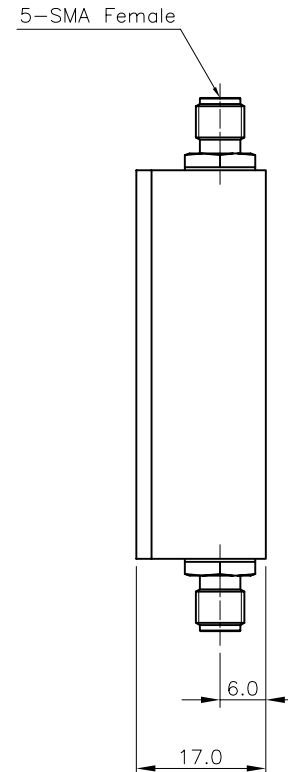



REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2005.09.27.
A	크로메이트 변경(황색 크로메이트->백색 크로메이트), SPEC 변경	2009.10.06.

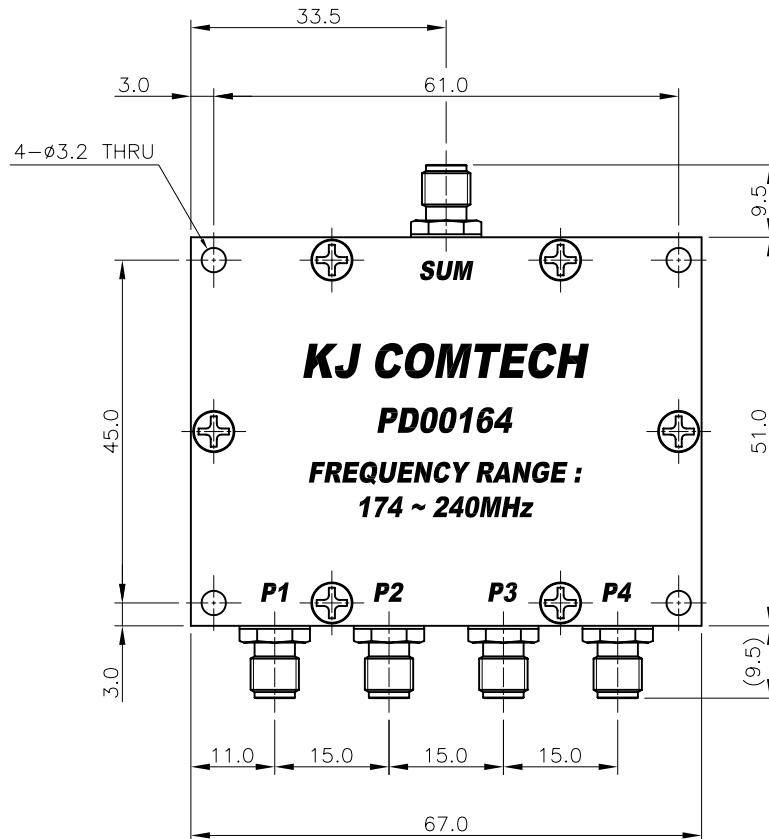

* ELECTRICAL SPECIFICATIONS
Frequency Range : 174.0 ~ 240.0MHz
Insertion Loss (Max.) : 6.62dB
V.S.W.R (Max.) : 1.25: 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50.0Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsBD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal ±0.3	DATE 2009. 10. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	A6061 T6	CHECKED BY	M.H.LEE	TITLE 4WAY POWER DIVIDER
		DRAWN BY	K.I.CHO	
FINISH White Chromate	SCALE 1/1	UNIT mm		DWG NO. PD00164-7/2 REVISION REV.A SHEET 1 of 1