


REVISION		
REV	DESCRIPTION	DATE
△		
△		

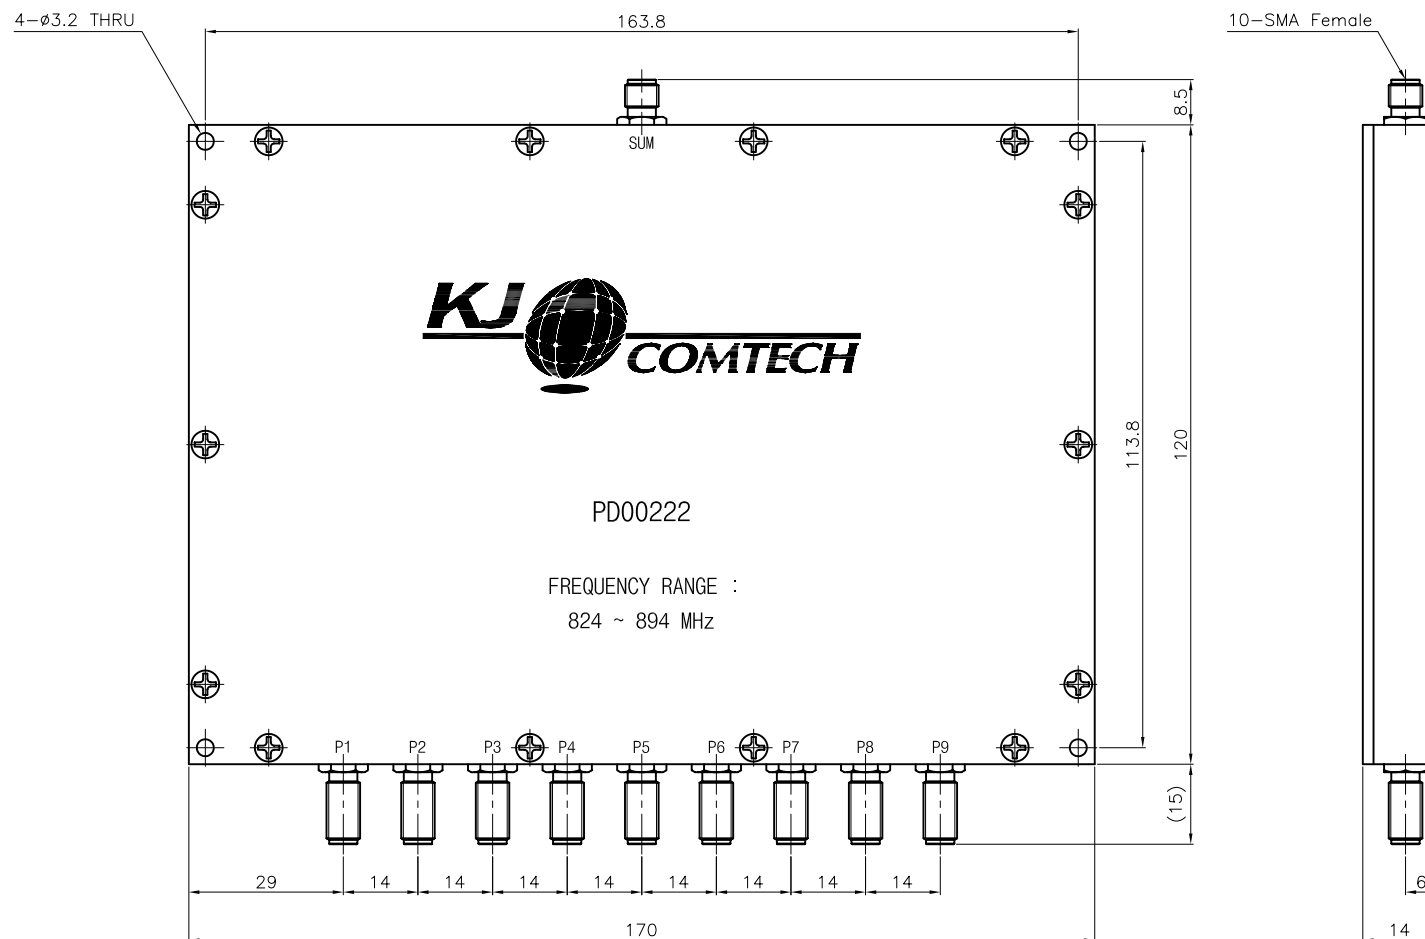

* ELECTRICAL SPECIFICATIONS

Frequency Range : 824.0 ~ 894.0MHz

Insertion Loss (Max.) : 10.2dB

V.S.W.R (Max.) : 1.2 : 1

Isolation (Min.) : 20.0dB

Amplitude Unbalance (Max.) : 0.3dB

Phase Unbalance (Max.) : 8.0°

Power Handling (Max.) : 1.0W

Impedance : 50Ω

* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (Yellow Chromate)

CONNECTORS : MBsBD (Nickel Plate)

CONNECTORS PINS : Beryllium Copper (Gold Plate)

INSULATORS : TEFLON

REVISION		I	R	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	REMARKS
TOLERANCE	Decimal	DATE				 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	± 0.3	APPROVED BY		2003. 3. 6.					
	Angle	CHECKED BY							
MATERIAL		DRAWN BY				TITLE			
A6061 T6						9WAY POWER DIVIDER			
FINISH		SCALE		UNIT		A3	DWG NO.		
Yellow Chromate		1/1		mm			PD00222-7/1		
						SHEET 1 OF 1			