
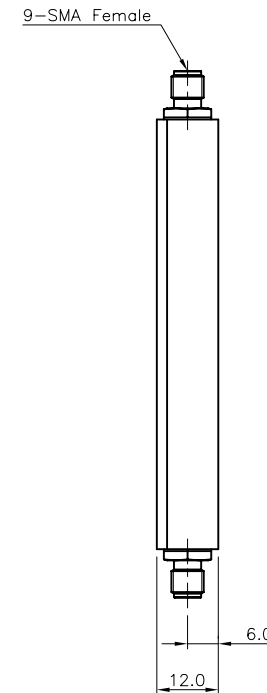


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009.09.22.

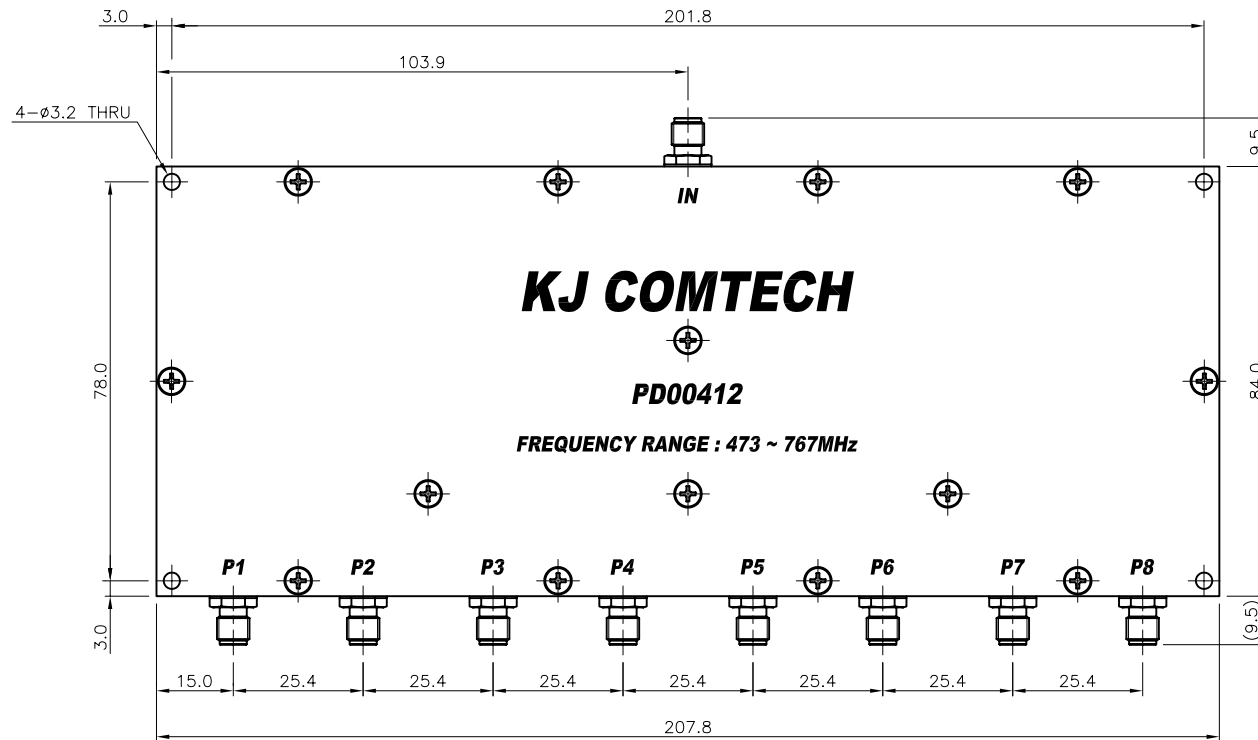

* ELECTRICAL SPECIFICATIONS
Frequency Range : 473.0 ~ 767.0MHz
Insertion Loss (Max.) : 9.8dB
V.S.W.R (Max.) : 1.2 : 1
Isolation (Min.) : 20.0dB
Power Handling (Max.) : 1.0W
Impedance : 50Ω

* MECHANICAL SPECIFICATIONS
HOUSING : A6061 T6 (White Chromate)
CONNECTORS : MBsD (Nickel Plate)
CONNECTORS PINS : Beryllium Copper (Gold Plate)
INSULATORS : TEFLON

* OTHER SPECIFICATIONS
MARKING COLOR : BLACK

TOLERANCE	Decimal	DATE		 COMTECH KJ COMTECH CO.,LTD.		RF & MICROWAVE TECHNOLOGY TEL: 82-32-347-8015 FAX: 82-32-347-8017	
	Angle	2009. 09. 22.					
MATERIAL	±0.3	APPROVED BY	J.H.YOUN		TITLE	8WAY POWER DIVIDER	
	±1°	CHECKED BY	M.H.LEE				
A6061 T6		DRAWN BY	K.I.CHO		A3	DWG NO.	PD00412-7/1
FINISH	SCALE	UNIT				REVISION	I R SHEET
White Chromate	1/1	mm					